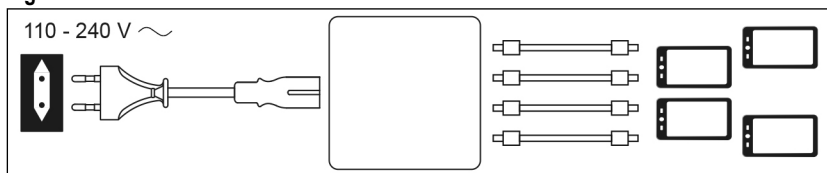


Fig. 1


**Technische Daten / Specifications / Spécifications / Specifiche / Datos técnicos /
 Technische gegevens / Teknische data / Tekniska data / Technická data / Dane techniczne**

Item number	61772
Connections	C8 appliance inlet (male), 2x USB-A QC (Quick Charge) socket, 2x USB-C™ PD (Power Delivery) socket
Input	110-240 V ~, 50/60 Hz, 1.5 A
Output PD1	5.0 V ---, 3.0 A, 15.0 W max. or 9.0 V ---, 3.0 A, 27.0 W max. or 12.0 V ---, 3.0 A, 36.0 W max. or 15.0 V ---, 3.0 A, 45.0 W max. or 20.0 V ---, 3.25 A, 65.0 W max.
Output PD2	5.0 V ---, 3.0 A, 15.0 W max. or 9.0 V ---, 2.0 A, 18.0 W max. or 12.0 V ---, 1.5 A, 18.0 W max.
Output QC1; Output QC2	5.0 V ---, 3.0 A, 15.0 W max. or 9.0 V ---, 2.0 A, 18.0 W max. or 12.0 V ---, 1.5 A, 18.0 W max.
Output PD1+PD2	Total 30.0 W max. + 18.0 W max.
Output PD2+QC1+QC2	Total 5.0 V ---, 3.0 A, 15.0 W max.
Output PD1+PD2&QC1&QC2	Total 30.0 W max. + 15.0 W max.
Average active efficiency	83.7 %
Efficiency at low load (10 %)	73.9 %
No-load power consumption	0.20 W
Protection class	II
Dimensions	87.2 x 91.0 x 19.5 mm
Weight	154 g
Power cable	
Connectors	Euro plug (Type C, CEE 7/16), C7 appliance coupler (female)
Length Weight	approx. 1.5 m 85 g

Fig. 2


**Verwendete Symbole / Symbols used / Symboles utilisés / Simboli utilizzati /
 Símbolos utilizados / Gebruikte symbolen / Brugte symboler / Använda symboler /
 Použité symboly / Stosowane symbole**

For indoor use only	IEC 60417- 5957	
Alternating current	IEC 60417- 5032	
Direct current	IEC 60417- 5031	
Class II equipment	IEC 60417- 5172	