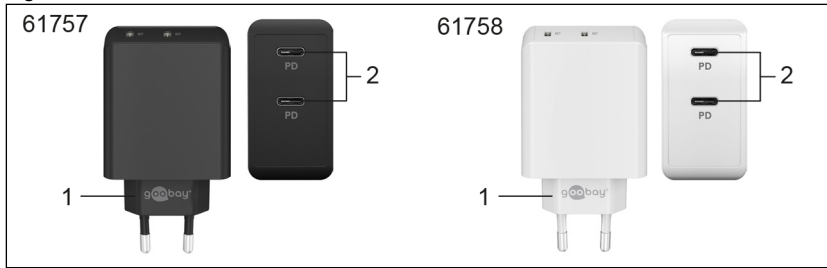


Fig. 1


**Technische Daten / Specifications / Spécifications / Specifiche / Datos técnicos /
 Technische gegevens / Tekniske data / Tekniska data / Technická data / Dane techniczne**


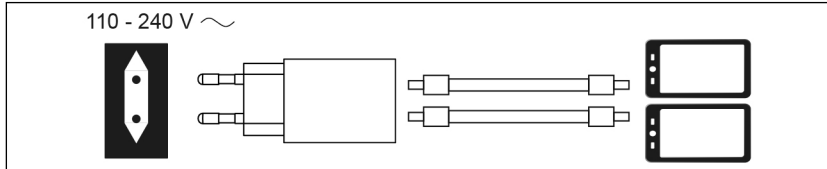




| Item number | 61757 | 61758 |
|-------------------------------|---|-------|
| Connections | Euro plug (Type C, CEE 7/16), 2x USB-C™ PD (Power Delivery) socket | |
| Input | 110-240 V ~, 50/60 Hz, 1.0 A | |
| Output USB-C™ PD | 5.0 V =, 3.0 A, 15.0 W max. or 9.0 V =, 3.0 A, 27.0 max. or 12.0 V =, 2.92 A, 35.0 W max. or 15.0 V =, 2.33 A, 35.0 W max. or 20.0 V =, 1.75 A, 35.0 W max. | |
| Total Output | 18.0 W + 18.0 W max. | |
| Average active efficiency | 81.9 % | |
| Efficiency at low load (10 %) | 73.8 % | |
| No-load power consumption | 0.12 W | |
| Protection class | II  | |
| Dimensions | 93.7 x 51 x 27 mm | |
| Weight | 93 g | |
| Colour | black | white |

Fig. 2


**Verwendete Symbole / Symbols used / Symboles utilisés / Simboli utilizzati /
 Simbolos utilizados / Gebruikte symbolen / Brugte symboler / Använda symboler /
 Použité symboly / Stosowane symbole**

| | | |
|---------------------|-----------------|---|
| For indoor use only | IEC 60417- 5957 |  |
| Alternating current | IEC 60417- 5032 |  |
| Direct current | IEC 60417- 5031 |  |
| Class II equipment | IEC 60417- 5172 |  |