

Panel mounting socket outlet straight - flange 90x90 fixing centers 60x60




| Product description | |
|---------------------------|--|
| BALS-Prd.-Nr | 130011 |
| EAN | 4024941222259 |
| Product category | Panel mounting socket outlet, straight |
| Current | 16A |
| Number of poles | 5p |
| Arrangement of phases | 3p+N+PE |
| Position of earth contact | 6 h |
| Voltage | 200/346 - 240/415V~ |

| Product description | |
|--------------------------------|--------------------------------------|
| Frequency | 50/60Hz |
| Protection degree | IP44 |
| Colour code | red RAL 3000 |
| Colour of appliance | white similar to RAL 9016 |
| Connection design | with screw terminal |
| Maximum conductor size | 4,0 qmm |
| Cable entry | other |
| Height | 90mm |
| Width | 90mm |
| Depth | 72mm |
| Flange size vertical in mm | 90mm |
| Flange size horizontal in mm | 90mm |
| Drill hole dist. vertical mm | 60mm |
| Drill hole dist. horizontal mm | 60mm |
| Material of enclosure | ABS + Polycarbonate |
| Contacts | the contacts are brass nickel plated |

| Additional technical properties | |
|--|--|
| | Architecture programme TH, hinged lid with labelling field (optional: key lock), For mounting in cable trunkings |

| Logistics data | |
|----------------|------------------|
| Weight/pcs | 0.231 kg / Piece |
| Packaging | Bag |
| Content amount | 1 ST |
| EAN | 4024941222259 |
| Length | 72 mm |
| Width | 90 mm |
| Height | 90 mm |
| Weight | 0.232 kg |
| Volume | 583.2 ccm |
| Packaging | Carton |
| Content amount | 6 ST |
| EAN | 4024941222563 |
| Length | 370 mm |
| Width | 218 mm |
| Height | 125 mm |
| Weight | 1.559 kg |
| Volume | 9,329.4 ccm |

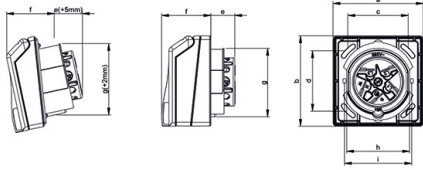

| Ampere Poles | 16 3 | 16 4 | 16 5 | 32 5 | Schutzk. Domestic |
|----------------------------|---------|---------|---------|---------|----------------------|
| a | 90,0 | 90,0 | 90,0 | 90,0 | 90,0 |
| b | 90,0 | 90,0 | 90,0 | 90,0 | 90,0 |
| c | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 |
| d | 60,0 | 60,0 | 60,0 | 60,0 | 60,0 |
| e | 23,0 | 24,0 | 24,0 | 36,0 | 16,0 |
| f | 48,0 | 48,0 | 48,0 | 48,0 | 48,0 |
| g | 66,0 | 66,0 | 69,0 | 78,0 | 66,0 |
| h | 63,0 | 63,0 | 63,0 | 74,0 | 63,0 |
| i | 67,0 | 67,0 | 67,0 | - | 67,0 |
| Cond. mm ² min. | 1,0 | 1,0 | 1,0 | 2,5 | 1,0 |
| Cond. mm ² max. | 4,0 | 4,0 | 4,0 | 10 | 2,5 |

4MB465

