


## Han D 15 Pos. M Insert Wire Wrap

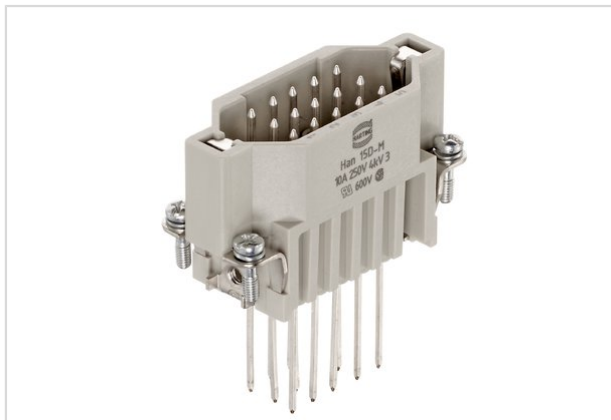

Part number	09 21 015 2601
Specification	Han D 15 Pos. M Insert Wire Wrap
HARTING eCatalogue	<a href="https://b2b.harting.com/09210152601">https://b2b.harting.com/09210152601</a>

### Identification

Category	Inserts
Series	Han D®

### Version

Termination method	Wrap termination
Gender	Male
Size	10 A
Number of contacts	15
PE contact	Yes
Termination length	22 mm

### Technical characteristics

Dimensions wire wrap post	1 x 1 mm
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	$\geq 500$

### Material properties

Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy



Pushing Performance

## Material properties

Surface (contacts)	Silver plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead

## Specifications and approvals

Specifications	EN 60664-1
	IEC 61984
	EN 175301-801
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076
	CSA-C22.2 No. 182.3 ECBT8.E235076

## Commercial data

Packaging size	12
Net weight	45.33 g
Country of origin	Romania
European customs tariff number	85366990