
# **BRUMBERG**


### ARTEMIS MAXI LED recessed spotlight, on/off switchable

Article no. 88272183

Light. For Generations.





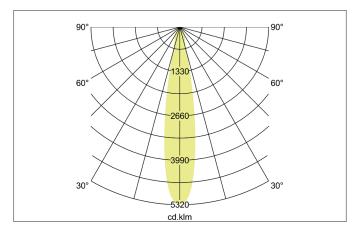



#### Tende

LED recessed spotlight, on/off switchable, Round. Ceiling cut-out Ø 170 mm, Installation depth 136 mm, Outer diameter 182 mm, Weight 1,300 kg, with rotattionssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a glass transparent cover.Luminous flux 5.243 lm, Power 1 x 41,5 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 90, Housing material: Aluminium, Colour: Black structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20, .With electronic driver, on/off switchable.

| Article data       |                                           |
|--------------------|-------------------------------------------|
| Article no.        | 88272183                                  |
| GTIN               | 4251433974765                             |
| Series name        | ARTEMIS MAXI                              |
| Short description  | LED recessed spotlight, on/off switchable |
| Material           | Aluminium                                 |
| Colour             | Black                                     |
| Type of surface    | Structure                                 |
| Shape              | Round                                     |
| Outer diameter     | 182 mm                                    |
| Built-in diameter  | 170 mm                                    |
| Installation depth | 136 mm                                    |
| Weight             | 1.300 kg                                  |

# **BRUMBERG**

## ARTEMIS MAXI LED recessed spotlight, on/off switchable

Article no. 88272183

Light. For Generations.

| Lighting technology |            |
|---------------------|------------|
| Colour temperature  | 3.000 K    |
| Light colour        | White      |
| Light output        | Direct     |
| Luminous flux       | 5,243 lm   |
| System efficiency   | 126 lm/W   |
| Colour rendering    | CRI > 90   |
| Reflector           | High-gloss |
| Beam angle          | 20°        |
| Light sharing       | Symmetric  |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequenz max.                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Protection class                      |                                                                                                                                                          |
| Degree of protection                  | IP20                                                                                                                                                     |
| Control                               | on/off                                                                                                                                                   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
|                                       | technician commissioned by finn or a similarly qualified person.                                                                                         |

| Mounting technology         |                                           |
|-----------------------------|-------------------------------------------|
| Mounting method             | Recessed mounting                         |
| Place of installation       | Ceiling-mounted                           |
| Adjustability               | Rotatable and adjustable head             |
| Swivel angle                | 90°                                       |
| Rotation angle              | 350°                                      |
| Head adjustable angle       | 90°                                       |
| Further references          | No cover with thermal insulation material |
| Material cover              | Glass transparent                         |
| Suitable for through-wiring | No                                        |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 1.37 kg                                                                                                                                                                                                                                                                                                                                                           |
| Length of packaging     | 182 mm                                                                                                                                                                                                                                                                                                                                                            |
| Packaging width         | 182 mm                                                                                                                                                                                                                                                                                                                                                            |
| Packaging hight         | 136 mm                                                                                                                                                                                                                                                                                                                                                            |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.  By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |