



Paulmann


Safety Instructions

1, 2, 3, 4, 5, 6, 7, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 28, 33, 34



31.08.2021
ENERGY LABEL
874/2012
A++ - A

01.09.2021
ENERGY LABEL
2019/2015
F




www.paulmann.com/symbols


Paulmann Licht GmbH
Quezinger Feld 2
31832 Springe
Germany

www.paulmann.com

Art.-Nr.: 947.32
(+MA 326) PCIK 07/22



1x

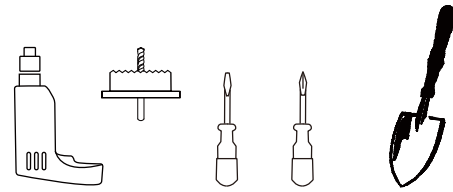

A

incl.
1x4.3W
GU 10

B1 B2

Safety Instructions Nr. 3, 4, 5, 6, 7

not incl. Junction-Box
Paulmann Art.-Nr.: 232

i IP65

≤500Kgs

Ø105 mm

130 mm

B1 B2

Safety Instructions Nr. 3, 4, 5, 6, 7

i IP65

≤500Kgs

not incl. Junction-Box
Paulmann Art.-Nr.: 232

C

7mm

14mm

230V~

>125mm

Ø105 mm

3-20 mm

D1 D2

on

D1 D2

on

230V~

230V~

230V~

230V~

a.

i

a.

The min bending diameter of rubber cable is 60 mm

min. ø60mm

< ø60mm

ENERGY

Paulmann
289.72

A

B

C

D

E

F

G

5 kWh/1000h

2019/2015

GU10
ø 51 mm
55 mm

320 lm

4,3 W

230V AC 50Hz

gold light
2200K

CRI/Ra ≥ 80

10 mm

CE UK CA

