


Pan-Ty® Cable Tie PLT4H

Flexible Heavy Cross Section


Provides excellent tensile strength that is expected with a Heavy Cross Section design. These cable ties install quickly and more easily than the typical Heavy Cross section ties. This innovative design allows no-slip gripping of the tip along with the ability to cinch with one hand. Installation with Panduit GTH or GS4H cable tie hand tools provides faster installation, exact bundle tension and smooth tie cut off. This flexible heavy cross section is ideal for heavy duty applications such as Truck, Bus, and Heavy Equipment.



Key Features	Benefits
Flexible strap body	Allows installation of the cable ties with one hand
Improved tip design	No-slip gripping of tail on initial insertion
Flexible locking design	Provides a low thread force for quick and easy installation to improve productivity and worker safety
Lower tool tension settings required	Easier, faster installation with lower installer effort to install ties to proper tension settings.
Material options	Available in both weather resistant (-0) and heat stabilized (-30) materials for application versatility

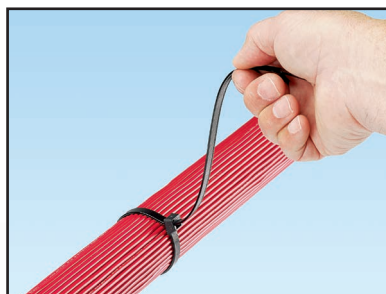

Flexible strap body for one-hand installation

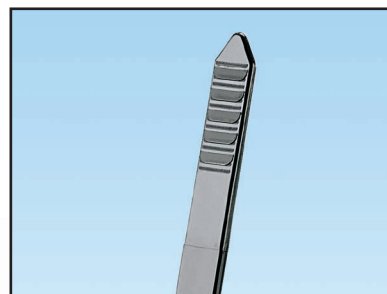

Improved tip design




Faster installation with Panduit GTH or GS4H cable tie hand tool.



Recommended tool setting of HVY 4-6 – Less force required to properly secure the cable tie.

Pan-Ty® Cable Tie PLT4H Flexible Heavy Cross Section

Ordering information



PLT4H-TL30/147 is UL 62275
(Type 2, 21)



PLT4H-TL30/147 is CSA-C22.2
No. 62275 (Type 2, 21)

Part Number	Length In. (mm)	Width In. (mm)	Max. Bundle Diameter (mm)	Min. Loop Tensile Strength Lbs. (N)	Material	Std. Pkg. Qty.	Std. Ctn. Qty.
PLT4H-TL0/147	14.5 (368)	0.300 (7.6)	4.11 (104.5)	120 (534)	Weather resistant nylon 6.6	250	2500
PLT4H-TL30/147					Heat stabilized nylon 6.6	250	2500


Industry Approvals

ABS (American Bureau of Shipping)
Bureau Veritas - PLT4H-TL0/147
Lloyd's Register of Shipping
Russian Maritime Register of Shipping

Other Heavy Cross Section Cable Tie Products




**Pan-Ty® Cable Ties
Heavy Cross Section**
Available in lengths from 8 inches
(206 mm) to 30 inches (775 mm)



**Pan-Ty® Clamp Ties
Heavy Cross Section**
Provides integrated mounting
in a one-piece design



**Pan-Ty® Stud Mount Ties
Heavy Cross Section**
Push onto a threaded stud
and tie wraps around bundle



**Pan-Ty® Double Loop Ties
Heavy Cross Section**
A fast and economical method to
secure and separate two bundles

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

©2015 Panduit Corp.
ALL RIGHTS RESERVED.
CTCB52--SA-ENG
8/2015