

Lighting

Linear luminaire For fluorescent lamps

GRP

6001/562-9010-15-131 Art. No. 221734



- Can be used in Zone 1, 2, 21 and 22
- Extremely robust: Impact strength rating of IK10

WebCode 6001A



The 6001 EXLUX luminaire is suited to normal lighting applications in almost any facility. In no time at all and with very little effort, using the accessories it can be fitted to the wall, ceiling or a pole, or alternatively, it can be suspended. The practical central lock has a safety switch that disconnects the power supply at all poles when the plastic enclosure is opened. Lightweight yet strong: The high-quality workmanship makes this luminaire robust and minimises maintenance requirements.

Technical Data

Explosion Protection

Ex version	Yes
Application range (zones)	1 2 21 22
IECEX gas certificate	IECEX PTB 13.0003
IECEX gas explosion protection	Ex db eb IIC T4 Gb
IECEX dust certificate	IECEX PTB 13.0003
IECEX dust explosion protection	Ex tb IIIC T80 °C Db
ATEX gas certificate	PTB 13 ATEX 2004
ATEX gas explosion protection	⊕ II 2 G Ex db eb IIC T4 Gb
ATEX dust certificate	PTB 13 ATEX 2004
ATEX dust explosion protection	⊕ II 2 D Ex tb IIIC T80 °C Db
EAC certificate	EAEU RU C-DE.HA91.B.00060/19
EAC gas explosion protection	⊕ 1 Ex d e IIC T4 Gb
EAC dust explosion protection	⊕ Ex tb IIIC T80°C Db
Certificates	ATEX (PTB), Brazil (ULB), China (CQST), EAC (ENDCE), IECEX (PTB), India (PESO), Polen (CNBOP), Taiwan (ITRI)

Electrical Data

Rated operational voltage AC	220 – 240 V
Rated operational voltage DC	220 – 240 V
Frequency range	50 – 60 Hz

Lighting Data

Number of lamps	2
Lamp wattage	58 W
Lamp	G13 lamp base

Lighting

Linear luminaire For fluorescent lamps

GRP

6001/562-9010-15-131 Art. No. 221734



Lighting Data

Luminaire efficacy	0 lm/W
Luminous flux	0 lm
Colour temperature	0 K

Ambient Conditions

Ambient temperature	-20 °C ... +55 °C
---------------------	-------------------

Mechanical Data

Version	Standard
Degree of protection IP (IEC 60598)	IP66
Class	I (with inner PE connection)
Enclosure material	Polyester resin, Glass fibre reinforced
Sealing material	Silicone
Silicon free	Contains silicone
Material translucent cover	Polycarbonate
Installed terminal strip	PE + N + L1 + L2 + L3
Connection terminals solid max.	6 mm ²
Connection terminals finely-stranded max.	4 mm ²
Lighting lock	Central lock , For box spanner actuation
Type of connection cable	Finely stranded Solid
Design size	6
Width	184 mm
Height	125 mm
Length	1610 mm
Impact strength (IEC 62262)	IK10
Enclosure colour	Light grey (RAL 7035)
Weight	8.3 kg
Weight	18.3 lb
Disconnection of the luminaire	Yes

Components

Threaded plate	2x plastic
Ballast	6042/963-21
Through wiring	Without
Drilled holes	3 x M25
Cable entries	2 x M25 Ø 7 – 17 mm
Material cable gland	Polyamide, black
Stopping plug	2 x M25 x 1.5
Stopping plug material	Polyamide, black
Accessories	Provided

Lighting


Linear luminaire For fluorescent lamps

GRP


6001/562-9010-15-131 Art. No. 221734



Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

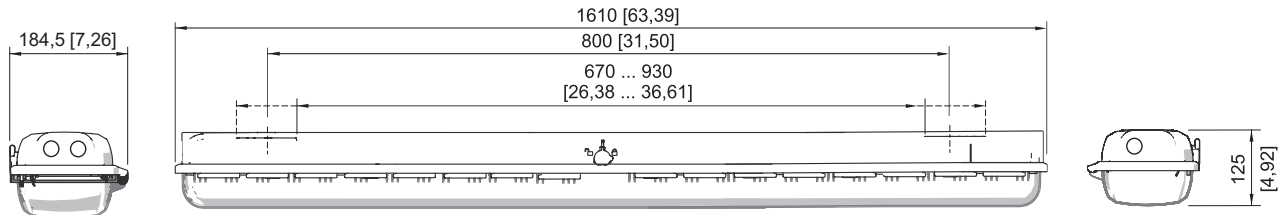

Size 6

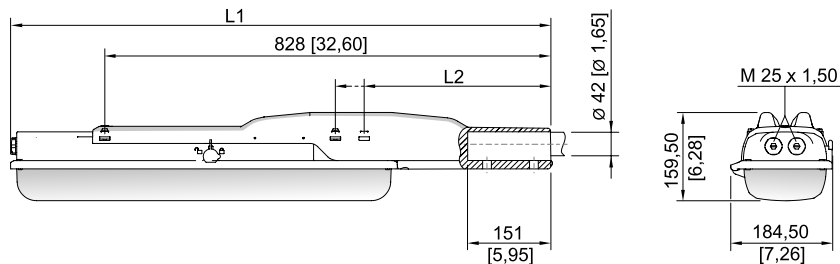

With pole mounting sleeve

Size 2:


L1 = 978 mm [38.50]

L2 = 390 mm [15.35]


Size 4:

L1 = 1587 mm [62.48]


L2 = 338 mm [13.31]

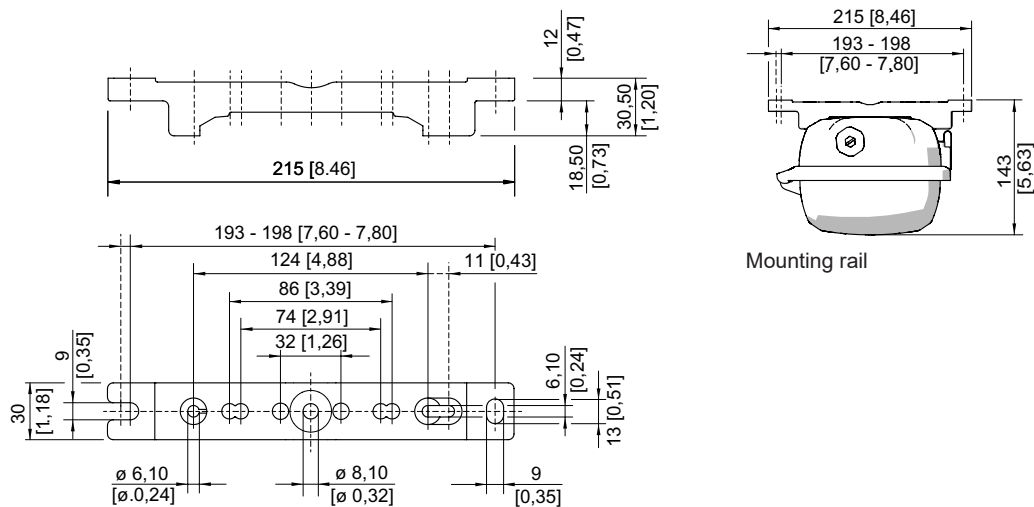

Mounting rail



Ring bolt fitted in insert nut of the luminaire




Mounting bracket fitted in mounting rail

Lighting



Linear luminaire For fluorescent lamps

GRP

6001/562-9010-15-131 Art. No. 221734




Pipe clamp fitted in mounting rail



Wall mounting bracket fitted in mounting rail

Accessories

Breather




Thread: M25 x 1.5; 1 pc; for installation in lights; in moulded material; without counter nut
 Thread: M25 x 1.5; 20 pc; for installation in lights; in moulded material; without counter nut

Art. No.

138573

138576

Ceiling and wall mounting bracket




mounted on a mounting rail for a variable mounting distance; Material: stainless steel; Lamp can be swiveled in steps of 15°; 1 pair

Art. No.

222827

Fluorescent lamp




58 W, 5200 lm

Art. No.

108950

Mounting bracket




mounting clamp mounted on a mounting rail for a variable mounting distance; 1 pair

Art. No.

222456

Mounting rail



for a variable mounting distance; 1 pair

Art. No.

222826

Lighting

Linear luminaire For fluorescent lamps

GRP

6001/562-9010-15-131 Art. No. 221734



Pipe clamp		Art. No.
	R 1 1/2"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222459
	R 1 1/4"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222458
	R 2"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222460

Pole mounting sleeve		Art. No.
	for the subsequent mounting on lights size 2 and size 4, completely with assembly parts (for pipe diameter 42 mm)	227512

Ring bolt		Art. No.
	M8, direct mounting in insert nuts; 1 pair	115736

Socket key		Art. No.
	M8 / wrench size 13; to open/close the central locking	222430

Spare Parts

Contact element		Art. No.
	8080/1-3-L 2 NC contact element	132527

Cover		Art. No.
	for luminaire size 6	222429

Lamp holder		Art. No.
	G13 Ex e lamp holder for light fittings with T8 fluorescent lamps for use in Zone 1	117252

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.