

## connector low voltage - with cable gland, Multi-Grip




| Product description       |                              |
|---------------------------|------------------------------|
| BALS-Prd.-Nr              | 4530                         |
| EAN                       | 4024941045308                |
| Product category          | ELV connector                |
| Current                   | 16A                          |
| Number of poles           | 3p                           |
| Arrangement of phases     | 3P                           |
| Position of earth contact | 4 h                          |
| Voltage                   | 20 up to 25 and 40 up to 50V |
| Frequency                 | 100 - 200Hz                  |

| Product description    |   |
|------------------------|---|
| Protection degree      | IP44  |
| Colour code            | green RAL 6002  |
| Colour of appliance    | Hinged lid green RAL 6002, Collar grey RAL 7035, Housing cover grey RAL 7035, Cable gland grey RAL 7035 |
| Connection design      | with screw terminal   |
| Maximum conductor size | 10,0 qmm  |
| Cable entry            | with cable gland  |
| Height                 | 152mm   |
| Width                  | 62mm  |
| Depth                  | 67mm  |
| Material of enclosure  | Polyamide   |
| Contacts               | The contact carrier is made of polyamide, the contacts are brass nickel plated                          |

| Additional technical properties |  |
|---------------------------------|--|
|                                 | For cable diameter from 11 up to max. 23,5 mm, Multi-Grip cable gland with gasket and integrated strain relief |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.203 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |
| EAN            | 4024941045308    |

| Logistics data |               |
|----------------|---------------|
| Length         | 67 mm         |
| Width          | 62 mm         |
| Height         | 152 mm        |
| Weight         | 0.204 kg      |
| Volume         | 631.408 ccm   |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941837620 |
| Length         | 275 mm        |
| Width          | 175 mm        |
| Height         | 137 mm        |
| Weight         | 2.155 kg      |
| Volume         | 5,737.5 ccm   |

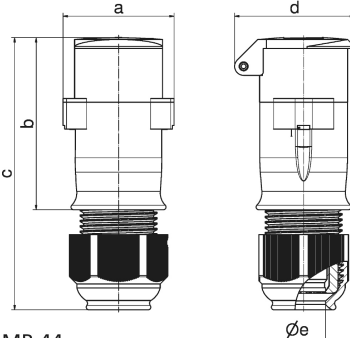

16 MB 44

| Ampere                     | 16    | 16    | 32    | 32    |  |  |  |
|----------------------------|-------|-------|-------|-------|--|--|--|
| Polzahl                    | 2     | 3     | 2     | 3     |  |  |  |
| a                          | 62,0  | 62,0  | 62,0  | 62,0  |  |  |  |
| b                          | 96,0  | 96,0  | 96,0  | 96,0  |  |  |  |
| c                          | 152,0 | 152,0 | 152,0 | 152,0 |  |  |  |
| d                          | 67,0  | 67,0  | 67,0  | 67,0  |  |  |  |
| e ø                        | 24,5  | 24,5  | 24,5  | 24,5  |  |  |  |
| Leiter mm <sup>2</sup> min | 4     | 4     | 4     | 4     |  |  |  |
| Leiter mm <sup>2</sup> max | 10    | 10    | 10    | 10    |  |  |  |
|                            |       |       |       |       |  |  |  |
|                            |       |       |       |       |  |  |  |
|                            |       |       |       |       |  |  |  |
|                            |       |       |       |       |  |  |  |

