


## Han 200A PE axial module, male 25-40mm<sup>2</sup>

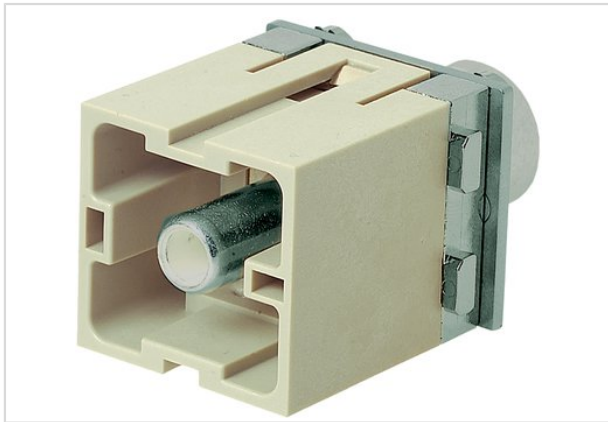

Part number	09 14 001 2668
Specification	Han 200A PE axial module, male 25-40mm <sup>2</sup>
HARTING eCatalogue	<a href="https://b2b.harting.com/09140012668">https://b2b.harting.com/09140012668</a>

### Identification

Category	Modules
Series	Han-Modular <sup>®</sup>
Type of module	Han <sup>®</sup> 200 A PE module

### Version

Termination method	Axial screw termination
Gender	Male
Number of contacts	1

### Technical characteristics

Conductor cross-section	25 ... 40 mm <sup>2</sup>
Contact resistance	≤0.2 mΩ
Limiting temperature	-40 ... +125 °C
Stripping length	16 mm
Tightening torque	8 Nm
Mating cycles	≥500

### Material properties

Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Surface (contacts)	Silver plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6a: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0,35 % lead by weight 6c: Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50



Pushing Performance

## Material properties

REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead

## Specifications and approvals

Specifications	EN 60664-1 IEC 61984
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076 UL 2237 PVVA2.E318390 CSA-C22.2 No. 182.3 PVVA8.E318390

## Commercial data

Packaging size	1
Net weight	98.88 g
Country of origin	Germany
European customs tariff number	85389099