

# Remote I/O

## Remote I/O IS1+ Analog Universal Module HART for Zone 1 Ex i

9468/32-08-11 Art. No. 210659



- Eight channels can be used individually as inputs or outputs
- Intrinsically safe Ex ia inputs/outputs with line fault monitoring and LED error indication for each channel
- Module hot swap in Zone 1 and Class I, Div. 1

WebCode 9468A



The 9468/32 series HART Analog Universal Module for Zone 1 and Class I, Div. 1 has eight channels that can be used individually for I.S. operating two-/three-wire HART transmitters, four-wire transmitters or control valves/positioners with 0/4 to 20 mA signals. HART communication is bidirectional.

All inputs/outputs are short-circuit proof, galvanically isolated from the system and individually monitored to check for line faults.

### Technical Data

#### Explosion Protection

Application range (zones)	1 2
Application range (Zone) note	A suitable enclosure in accordance with the area of application must be used. Refer to the operating instructions.
Ex interface zone	0 1 2 20 21 22
IECEX gas certificate	IECEX DEK 12.0054X
IECEX gas explosion protection	Ex ia [ia Ga] IIC T4 Gb
IECEX dust certificate	IECEX DEK 12.0054X
IECEX dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	DEKRA 12 ATEX0173 X
ATEX gas explosion protection	Ex II 2 (1) G Ex ia [ia Ga] IIC T4 Gb
ATEX dust certificate	DEKRA 12 ATEX0173 X
ATEX dust explosion protection	Ex II (1) D [Ex ia Da] IIIC
Certificate FMus	FM17US0332X
Certificate cFM	FM16CA0134X
Marking cFMus	IS, Class I, Div. 1, Groups A,B,C,D; Class I, Zone 1, AEx/Ex ia [ia] IIC AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; T4 at Ta = 75°C See Doc. 9468 6 031 001 1
EAC certificate	TS RU S-DE.GB04.B.00448
EAC gas explosion protection	Ex II 2 Ex nA ia [ia Ga] IIC T4 Gc X

# Remote I/O

## Remote I/O IS1+ Analog Universal Module HART for Zone 1 Ex i

9468/32-08-11 Art. No. 210659



### Explosion Protection

EAC dust explosion protection	Ex ia Da IIC
Certificates	ATEX (DEK), Brazil (ULB), Canada (FM), IECEx (DEK), India (PESO), Korea (KTL), Russia (Meteorological certificate), USA (FM)
Ship approval	EU RO MR
Notes	CCC certificate available from 2021 onward
Installation	Zone 1, Zone 2 and in the safe area
Further information	see operating instructions and certificate

### Safety Data

Maximum voltage $U_o$	24.4 V								
Max. current $I_o$ (2-conductor)	80 mA								
Max. power $P_o$ (2-conductor)	488 mW								
Max. current $I_o$ (3-conductor)	81.8 mA								
Max. power $P_o$ (3-conductor)	499 mW								
Internal capacitance $C_i$	negligible								
Internal inductance $L_i$	negligible								
Max. connectable inductance $L_o$ / capacity $C_o$									
2-wire input/output									
IIC	$L_o$ [mH]	3.8	2	1	0.5	0.2			
	$C_o$ [nF]	53	59	71	88	119			
IIB	$L_o$ [mH]	23	10	2	1	0.5	0.2	0.1	0.05
	$C_o$ [nF]	370	430	430	470	550	700	860	890
3-wire input									
IIC	$L_o$ [mH]	3.6	2	1	0.5	0.2			
	$C_o$ [nF]	53	58	70	87	119			
IIB	$L_o$ [mH]	21	10	2	1	0.5	0.2	0.1	0.05
	$C_o$ [nF]	380	420	420	470	550	700	860	890

Limits 4-conductor transmitter	$U_o$ , $I_o$ , $P_o$ , $C_i$ and $L_i$ are negligible. Maximum connectable safety characteristic values during operation with active 4-wire-transmitters:		
	Max. input voltage $U_i$ [V]	Max. input current $I_i$ [mA]	Max. ambient temperature $T_{amb}$ [°C]
	28	150	55
	28	140	60
	28	130	65
	28	115	70
	28	105	75

### Electrical Data

Number of channels	8 Ex i inputs/outputs
--------------------	-----------------------

# Remote I/O

## Remote I/O IS1+ Analog Universal Module HART for Zone 1 Ex i

9468/32-08-11 Art. No. 210659



### Electrical Data

Channels	each with adjustable parameters as input or output (3-wire, 4-wire transmitters, or active mA-sources occupy 2 channels)
Notes	In order to operate an active 4-wire HART transmitter, a 9164 must be connected between each channel. 9164 is not required when operating 4-wire transmitter without HART communication.
Nominal signal	4 ... 20 mA 0 ... 20 mA
Min. signal	0 mA
Supply voltage	16 V, at 20 mA for 2-wire transmitters
Communication signal	HART protocol
Connection Ex i field signals	Pluggable, blue terminals, 16-pole, 2.5 mm <sup>2</sup> , screw- or spring-type versions with lock

Signal transmission		Filter time constant (adjustable parameters)		
		small	medium	50 Hz, 60 Hz
	Resolution in the range 4 ... 20 mA	14.75 bit (with HART: 12.75 bit)	14.75 bit	14.75 bit
	Maximum delay from signal / internal bus	32 ms	120 ms	500 ms

### Auxiliary Power

Power supply connection	BusRail type 9494
Auxiliary power version	Intrin. safe Ex ia via BusRail
Current consumption	220 mA (at 20 mA per channel)
Max. power consumption	5.3 W (at 20 mA / channel)
Max. power dissipation outputs	3.7 W (at 20 mA. 500 Ω / channel)
Max. power dissipation inputs	2.7 W (at 20 mA / channel)

### Galvanic Isolation

Test voltage for galvanic isolation	acc. to standard EN 60079-11
Auxiliary power/system components	≥ 1500 V AC
I/O module / I/O module	≥ 500 V AC
I/O channels/system components	≥ 500 V AC
I/O channels / ground (PA)	≥ 500 V AC

### Input

Max. signal for input	23.5 mA
Max. input short-circuit current	24 mA
Max. input resistance	14,1 Ω per channel

### Output

Output step response (10 ... 90 %)	40 ms
Max. output short-circuit current	23,5 mA (0 ... 20 mA) 22,8 mA (4 ... 20 mA)
Max. signal for output	23,5 mA (0 ... 20 mA) 22,8 mA (4 ... 20 mA)
Output load resistance max.	750 Ω at 20 mA 700 Ω at 21,8 mA

### Device Specific Data

Signal type	output input
-------------	-----------------

## Remote I/O

### Remote I/O IS1+ Analog Universal Module HART

for Zone 1 Ex i

9468/32-08-11 Art. No. 210659



#### Device Specific Data

Diagnostics message module	ON OFF
Signal filter module	big 50 Hz big 60 Hz medium small
Scan HART live list module	ON OFF
Signal range	4 ... 20 mA 0 ... 20 mA
Input measuring range	2,4 ... 22,8 or 23,5 mA 3,6 ... 21 mA (acc. to NAMUR)
Line fault monitoring	ON OFF
Input behaviour in case of error	Alarmcode, hold last value 110% 100% 0% -10%
Output behaviour in case of error	110% 100% 0% -10% hold last value
Cyclic data transmission of HART variants	4HV 8HV no
LED module requires maintenance	LED "M/S", blue
LED operating conditions	LED "RUN", green
LED group error	LED "ERR", red
LED channel error	LED per channel, red
Retrievable parameters	type software revision serial number manufacturer hardware revision
Module status and alarms	Internal bus error primer / redundant No response from IOM Configuration does not correspond to the module Hardware error Excess temperature Slot error Module requires maintenance
Signal status bit	1 = signal disturbed 0 = signal valid
Wire breakage input	adjust. parameters, at 4 ... 20 < 2,4 mA / 3,6 mA
Short circuit input	> 23,5 mA > 22,8 mA / > 21 mA (adjustable parameters)

# Remote I/O

## Remote I/O IS1+ Analog Universal Module HART for Zone 1 Ex i

9468/32-08-11 Art. No. 210659



### Device Specific Data

Wire breakage output	Terminal voltage > 16 V (response range 16 ... 16.5 V) or output current can not longer be set		
Short circuit output	Output load < 60 Ω (response range 40 ... 60 Ω )		
Influence of ambient temperature	< 0,03 % / 10 K		
Accuracy of measurement			
Error of measurement with filter time constant	small	medium	50 Hz, 60 Hz
Maximum error of measurement	0.075 % (12 μA at 4 ... 20 mA)	0.05 % (8 μA at 4 ... 20 mA)	0.05 % (8 μA at 4 ... 20 mA)

Note: All values in % of the signal span at 23 °C

### Ambient Conditions

Ambient temperature	-40 °C ... +75 °C observe operating instructions
Ambient temperature	-40°F ... +167°F observe operating instructions
Storage temperature	-40 °C ... +80 °C
Storage temperature	-40°F ... +176°F
Max. operating altitude	< 2000 m
Max. relative humidity	95 % (without condensation)
Shock (semi-sinusoidal)	(IEC EN 60068-2-27) 15 g (3 shocks per axis and direction)
Vibration (sinusoidal)	(IEC EN 60068-2-6) Frequency range 2 ... 13.2 Hz    Amplitude 1 mm (peak value) Frequency range 13.2 ... 100 Hz    Acceleration amplitude 0.7 g
Electromagnetic compatibility	Tested to the following standards and regulations: EN 61326-1 (2006) IEC 61000-4-1 to 61000-4-6, NAMUR NE 21

### Mechanical Data

Degree of protection IP (IEC 60529)	IP20
Module enclosure	Polyamide 6GF
Fire resistance (UL 94)	V2
Pollutant class	corresponds to G3
Width	96.5 mm
Width inches	3.8 in
Depth	68 mm
Length	128 mm
Length inches	5.04 in
Mounting depth inches	2.64 in
Weight	0.275 kg
Weight	0.61 lb

### Mounting / Installation

Mounting position	vertical horizontal
-------------------	------------------------

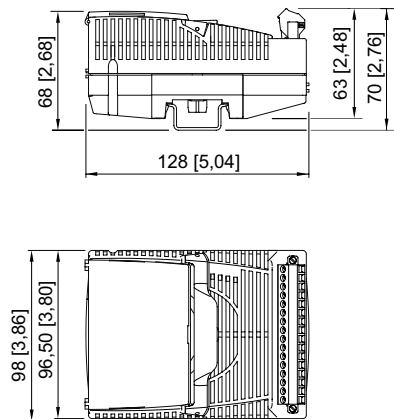
## Remote I/O

Remote I/O IS1+ Analog Universal Module HART  
for Zone 1 Ex i

9468/32-08-11 Art. No. 210659



Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations



# Remote I/O









## Remote I/O IS1+ Analog Universal Module HART

for Zone 1 Ex i

9468/32-08-11 Art. No. 210659



### Accessories

Pluggable terminal		Art. No.
	2.5 mm <sup>2</sup> with lock, 16-pole, screw connector, blue, for connecting the field signals to I/O modules, for intrinsically safe field circuits Labelling: 1 ... 16 Attention: An additional terminal is necessary for I/O module Series 9470 and 9482. Labelling: 17 ... 32	162702
	2.5 mm <sup>2</sup> with lock, 16-pole, spring clamp connection, blue, for connecting the field signals to I/O modules, for intrinsically safe field circuits, incl. test jacks Labelling: 1 ... 16 Attention: An additional terminal is necessary for I/O module Series 9470 and 9482. Labelling: 17 ... 32	162695
Electronic relay		Art. No.
	The electronic relay modules are used to switch from Ex e loads via intrinsically safe (Ex i) or non-intrinsically safe (Ex e) control. Coil circuit: Ex i or non-Ex i (Ex e)* Contact circuit: Non-Ex i (Ex e) *You can switch between Ex i and non-Ex i circuits, or vice-versa, at any time without restriction.	282457
Ex i/Ex e relay module for Zone 1		Art. No.
	The Ex i/Ex e relay modules are used for the galvanically isolated switching of intrinsically safe circuits (Ex i) and non-Ex i (Ex e) electrical circuits. Coil circuit: Ex i or non-Ex i (Ex e)* Contact circuit: Ex i or non-Ex i (Ex e)* *You can switch between Ex i and non-Ex i circuits, or vice-versa, at any time without restriction	273000
mA-Isolating repeater		Art. No.
	The mA isolating repeaters are used for the connection of 4-wire transmitters to active 2-wire inputs and for the galvanic separation. Input: sink, Ex e Output: sink, Ex i	224365
	The mA isolating repeaters are used for the connection of 4-wire transmitters to active 2-wire inputs and for the galvanic separation. Input: sink, Ex i Output: sink, Ex i	224364
Resistor error message suppression		Art. No.
	The resistors are used to suppress error messages for unused I/O channels Resistance value: 5K6 / 0.5 W Suitable for: AIM 9468; UMH 9469; DIOM 9470; DIOM 9471; DIOM 9472; DOM 9475 For intrinsically safe circuits (simple apparatus according to EN 60079-11)	244911
	The resistors are used to suppress error messages for unused I/O channels Resistance value: 62R / 0.5 W Suitable for: AOM 9468; UMH 9469; DIOM 9472; TIM 9482	244912
Partition		Art. No.
	For mounting between intrinsically safe and non-intrinsically safe connections of the I/O modules, in order to adhere to the required 50 mm distance	220101

# Remote I/O

## Remote I/O IS1+ Analog Universal Module HART


for Zone 1 Ex i

9468/32-08-11 Art. No. 210659




### Spare Parts


#### Warning sign

		Art. No.
	"Clean modules only with a damp cloth."	162796

#### Labelling strips

		Art. No.
	"FB Addr ... Mod No ..." for pluggable terminal, 26 pieces on the sheet	162788

#### DIN A4 sheet

		Art. No.
	For the label plate on I/O modules, 6 labels per sheet Print IS Wizard, packaging unit = 20 sheets	162832

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.