


# panel mounting socket outlet, straight - flange 107x100 fixing centers 85x77

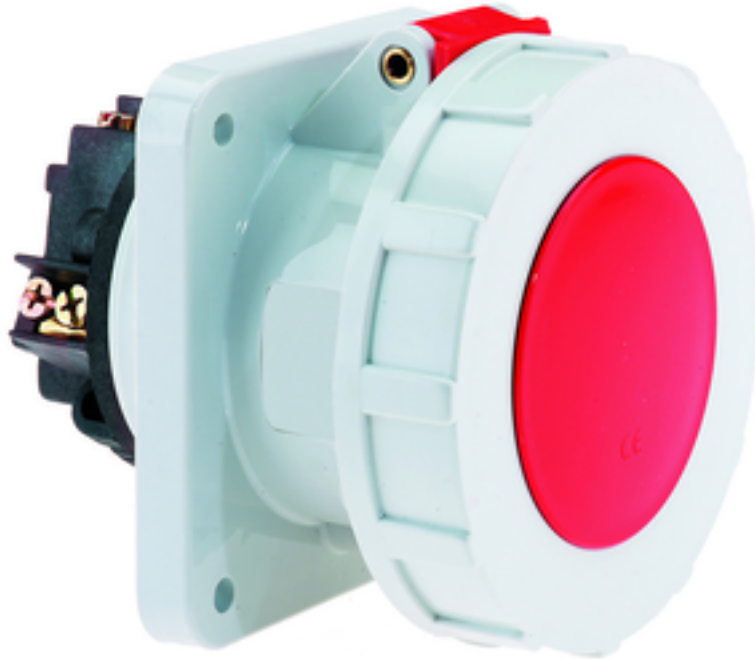

Product description	
BALS-Prd.-Nr	13385
EAN	4024941133852
Product category	TE panel mounting socket outlet, straight
Current	63A
Number of poles	5p
Arrangement of phases	3p+N+PE
Position of earth contact	6 h
Voltage	200/346 - 240/415V~

Product description	
Frequency	50/60Hz
Protection degree	IP67
Colour code	red RAL 3000
Colour of appliance	Hinged lid red RAL 3000, Enclosure grey RAL 7035, Bayonet ring grey RAL 7035
Connection design	screw terminal as box terminal with Kontex-contact
Maximum conductor size	25.0 qmm
Cable entry	other
Height	114mm
Width	111mm
Depth	133mm
Flange size vertical in mm	107mm
Flange size horizontal in mm	100mm
Drill hole dist. vertical mm	85mm
Drill hole dist. horizontal mm	77mm
Material of enclosure	Polyamide
Contacts	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Logistics data	
Weight/pcs	0.551 kg / Piece
Packaging	Bag

Logistics data	
Content amount	1 ST
EAN	4024941133852
Length	133 mm
Width	111 mm
Height	114 mm
Weight	0.552 kg
Volume	1,682.982 ccm
Packaging	Carton
Content amount	5 ST
EAN	4024941821391
Length	295 mm
Width	185 mm
Height	215 mm
Weight	2.919 kg
Volume	9,975 ccm



	63	63	63				
Ampere	63	63	63				
Polzahl	3	4	5				
a	107,0	107,0	107,0				
b	100,0	100,0	100,0				
c	85,0	85,0	85,0				
d	77,0	77,0	77,0				
e ø	6,5	6,5	6,5				
f	12,0	12,0	12,0				
h	56,5	56,5	56,5				
i	76,0	76,0	76,0				
k	113,0	113,0	113,0				
l ø	88,0	88,0	88,0				
m	7,0	7,0	7,0				
Leiter mm <sup>2</sup> min	6	6	6				
Leiter mm <sup>2</sup> max	25	25	25				

4 MB 50