



Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.08 08 06</b>	PEXe 06010	75 x 80 x 56
<b>16.08 08 06</b>	PEXi 16010	75 x 80 x 56
<b>26.08 08 06</b>	PExB 26010	75 x 80 x 56

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	7	7									
	1	1									
	6										
	10	27									
	16	9	18								
	20	3	10								
	25		5								
	35										
	50										
	63										
	80										
	100										
	125										
	160										
	200										
	225										
	250										
	315										
	400										
500											

M	Seite	
	A/B	C/D
12	6	3
16	2	1
20	2	1
25	1	
32		
40		
50		
63		
75		
85		

Tragschiene	TS 15
Länge (mm)	63
max. Bestückungslänge (mm)	38,5



Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.08 08 08</b>	PEXe 06015	75 x 80 x 75
<b>16.08 08 08</b>	PEXi 16015	75 x 80 x 75
<b>26.08 08 08</b>	PExB 26015	75 x 80 x 75

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	8	8	7								
	1	1	1								
	6										
	10	32									
	16	11	21	84							
	20	4	12	24							
	25		6	13							
	35			4							
	50										
	63										
	80										
	100										
	125										
	160										
	200										
	225										
	250										
	315										
	400										
500											

M	Seite	
	A/B	C/D
12	9	5
16	5	2
20	4	2
25	1	1
32	1	1
40		
50		
63		
75		
85		


Tragschiene	TS 15
Länge (mm)	63
max. Bestückungslänge (mm)	38,5

























Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.08 11 06</b>	PEXe 06020	75 x 110 x 56
<b>16.08 11 06</b>	PEXi 16020	75 x 110 x 56
<b>26.08 11 06</b>	PExB 26020	75 x 110 x 56

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



M	Seite	
	A/B	C/D
12	6	3
16	3	1
20	2	1
25	1	
32		
40		
50		
63		
75		
85		

Tragschiene	TS 15
Länge (mm)	98
max. Bestückungslänge (mm)	68,5

	1,5	2,5	4	6	10	16	25	35	50	70	95
	13	13									
	1	1									
	6										
	10	28									
	16	9	18								
	20	4	11								
	25		5								
	35										
	50										
	63										
	80										
	100										
	125										
	160										
	200										
	225										
	250										
	315										
	400										
	500										

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262























M	Seite	
	A/B	C/D
12	15	5
16	6	2
20	6	1
25	2	1
32	2	1
40		
50		
63		
75		
85		


Tragschiene	TS 15
Länge (mm)	98
max. Bestückungslänge (mm)	68,5




Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.08 11 08</b>	PEXe 06025	75 x 110 x 75
<b>16.08 11 08</b>	PEXi 16025	75 x 110 x 75
<b>26.08 11 08</b>	PExB 26025	75 x 110 x 75






	1,5	2,5	4	6	10	16	25	35	50	70	95
	14	14	11								
	1	1	1								
	6										
	10	33									
	16	11	22	86							
	20	4	13	25							
	25		6	14							
	35			4							
	50										
	63										
	80										
	100										
	125										
	160										
	200										
	225										
	250										
	315										
	400										
	500										



	Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
	<b>06.08 16 06</b>	PExe 06030	75 x 160 x 56
	<b>16.08 16 06</b>	PExi 16030	75 x 160 x 56
	<b>26.08 16 06</b>	PExB 26030	75 x 160 x 56


Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262




	1,5	2,5	4	6	10	16	25	35	50	70	95
	23	23									
	1	1									
 x  A	6										
	10	28									
	16	9	19								
	20	4	11								
	25		5								
	35										
	50										
	63										
	80										
	100										
	125										
	160										
	200										
	225										
	250										
	315										
	400										
500											






M	Seite	
	A/B	C/D
12	12	3
16	5	1
20	4	1
25	3	
32		
40		
50		
63		
75		
85		

Tragschiene	TS 15
Länge (mm)	148
max. Bestückungslänge (mm)	118,5

	Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
	<b>06.08 16 08</b>	PExe 06035	75 x 160 x 75
	<b>16.08 16 08</b>	PExi 16035	75 x 160 x 75
	<b>26.08 16 08</b>	PExB 26035	75 x 160 x 75

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	23	23	20								
	1	1	1								
 x  A	6										
	10	34									
	16	11	22	87							
	20	4	13	25							
	25		6	14							
	35			4							
	50										
	63										
	80										
	100										
	125										
	160										
	200										
	225										
	250										
	315										
	400										
500											

M	Seite	
	A/B	C/D
12	18	5
16	8	2
20	8	2
25	3	1
32	2	1
40		
50		
63		
75		
85		

Tragschiene	TS 15
Länge (mm)	148
max. Bestückungslänge (mm)	118,5



	Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
	<b>06.08 19 06</b>	PEXe 06040	75 x 190 x 56
	<b>16.08 19 06</b>	PExi 16040	75 x 190 x 56
	<b>26.08 19 06</b>	PExB 26040	75 x 190 x 56

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262

	1,5	2,5	4	6	10	16	25	35	50	70	95
	28	28									
	1	1									
 x A	6										
	10	28									
	16	9	19								
	20	4	11								
	25		5								
	35										
	50										
	63										
	80										
	100										
	125										
	160										
	200										
	225										
	250										
	315										
	400										
500											

M	Seite	
	A/B	C/D
12	16	4
16	7	1
20	5	1
25	4	1
32		
40		
50		
63		
75		
85		

Tragschiene	TS 15
Länge (mm)	174
max. Bestückungslänge (mm)	148,5

	Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
	<b>06.08 19 08</b>	PEXe 06045	75 x 190 x 75
	<b>16.08 19 08</b>	PExi 16045	75 x 190 x 75
	<b>26.08 19 08</b>	PExB 26045	75 x 190 x 75

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262

	1,5	2,5	4	6	10	16	25	35	50	70	95
	29	29	24								
	1	1	1								
 x A	6										
	10	33									
	16	11	22	87							
	20	4	13	25							
	25		6	14							
	35			4							
	50										
	63										
	80										
	100										
	125										
	160										
	200										
	225										
	250										
	315										
	400										
500											

M	Seite	
	A/B	C/D
12	28	6
16	12	2
20	12	2
25	5	1
32	3	1
40		
50		
63		
75		
85		

Tragschiene	TS 15
Länge (mm)	174
max. Bestückungslänge (mm)	148,5





Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.08 23 06</b>	PEXe 06050	75 x 230 x 56
<b>16.08 23 06</b>	PEXi 16050	75 x 230 x 56
<b>26.08 23 06</b>	PExB 26050	75 x 230 x 56

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	36	36									
N	1	1									
x A	6										
	10	28									
	16	9	19								
	20	4	11								
	25		5								
	35										
	50										
	63										
	80										
	100										
	125										
	160										
	200										
	225										
	250										
	315										
400											
500											

M	Seite	
	A/B	C/D
12	22	3
16	10	1
20		1
25	4	1
32		
40		
50		
63		
75		
85		

Tragschiene	TS 15
Länge (mm)	218
max. Bestückungslänge (mm)	188,5



Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.08 23 08</b>	PEXe 06055	75 x 230 x 75
<b>16.08 23 08</b>	PEXi 16055	75 x 230 x 75
<b>26.08 23 08</b>	PExB 26055	75 x 230 x 75

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	37	37	31								
N	1	1	1								
x A	6										
	10	33									
	16	11	22	86							
	20	4	13	25							
	25		6	14							
	35			4							
	50										
	63										
	80										
	100										
	125										
	160										
	200										
	225										
	250										
	315										
400											
500											

M	Seite	
	A/B	C/D
12	30	6
16	16	2
20	12	2
25	6	1
32	4	1
40		
50		
63		
75		
85		

Tragschiene	TS 15
Länge (mm)	218
max. Bestückungslänge (mm)	188,5








Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.12 12 09</b>	PEXe 06060	120 x 122 x 91
<b>16.12 12 09</b>	PEXi 16060	120 x 122 x 91
<b>26.12 12 09</b>	PExB 26060	120 x 122 x 91

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	19	15	13	10	8	6					
	1	1	1	1	1	1					
	6										
	10	43									
	16	14	28	111							
	20	6	16	32							
	25		8	18	35						
	35			5	13	34					
	50				2	11	28				
	63					3	13				
	80						5				
	100										
	125										
	160										
	200										
	225										
	250										
	315										
400											
500											

M	Seite	
	A/B	C/D
12	12	12
16	5	5
20	4	4
25	2	2
32	1	1
40	1	1
50		
63		
75		
85		




Tragschiene	TS 35
Länge (mm)	107
max. Bestückungslänge (mm)	65



Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.12 22 09</b>	PEXe 06065	120 x 220 x 91
<b>16.12 22 09</b>	PEXi 16065	120 x 220 x 91
<b>26.12 22 09</b>	PExB 26065	120 x 220 x 91

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	42	34	29	21	17	14					
	1	1	1	1	1	1					
	6										
	10	46									
	16	15	30	119							
	20	6	18	34							
	25		8	19	37						
	35			5	14	36					
	50				2	12	30				
	63					4	14				
	80						5				
	100										
	125										
	160										
	200										
	225										
	250										
	315										
400											
500											

M	Seite	
	A/B	C/D
12	32	12
16	14	5
20	12	4
25	6	2
32	3	1
40	2	1
50		
63		
75		
85		


Tragschiene	TS 35
Länge (mm)	205
max. Bestückungslänge (mm)	166,5





Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.16 16 09</b>	PEExe 06070	160 x 160 x 91
<b>16.16 16 09</b>	PEXi 16070	160 x 160 x 91
<b>26.16 16 09</b>	PExB 26070	160 x 160 x 91

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	28	23	19	14	11	9	7	7			
<b>U N</b>	1	1	1	1	1	1	1	1			
	6										
	10	48									
	16	16	32	125							
	20	7	19	36							
	25		9	20	39						
	35			6	15	38					
	50				2	12	32				
	63					4	14	52			
	80						5	16	59		
	100							7	15		
	125								6		
	160										
	200										
	225										
	250										
	315										
400											
500											


M	Seite	
	A/B	C/D
12	26	18
16	14	8
20	9	6
25	6	3
32	3	2
40	2	1
50	2	1
63		
75		
85		

Tragschiene	TS 35
Länge (mm)	144
max. Bestückungslänge (mm)	105



Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.16 26 09</b>	PEExe 06075	160 x 260 x 91
<b>16.16 26 09</b>	PEXi 16075	160 x 260 x 91
<b>26.16 26 09</b>	PExB 26075	160 x 260 x 91

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	52	42	35	26	21	18	14	14			
<b>U N</b>	1	1	1	1	1	1	1	1			
	6										
	10	52									
	16	18	35	136							
	20	7	20	39							
	25		9	22	43						
	35			6	16	41					
	50				2	13	34				
	63					4	16	57			
	80						6	17	64		
	100							7	16		
	125								6		
	160										
	200										
	225										
	250										
	315										
400											
500											

M	Seite	
	A/B	C/D
12	50	16
16	26	8
20	17	6
25	11	3
32	5	2
40	3	1
50	3	
63		
75		
85		

Tragschiene	TS 35
Länge (mm)	245
max. Bestückungslänge (mm)	205





Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.16 36 09</b>	PEXe 06080	160 x 360 x 91
<b>16.16 36 09</b>	PEXi 16080	160 x 360 x 91
<b>26.16 36 09</b>	PExB 26080	160 x 360 x 91

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	76	61	51	39	31	26	21	21			
	1	1	1	1	1	1	1	1			
 x A	6										
	10	53									
	16	18	35	138							
	20	7	20	40							
	25		9	22	43						
	35			6	17	42					
	50				2	14	35				
	63					4	16	58			
	80						6	18	65		
	100							7	17		
	125								7		
	160										
	200										
	225										
	250										
	315										
400											
500											

M	Seite	
	A/B	C/D
12	72	18
16	38	8
20	26	6
25	16	3
32	7	2
40	5	1
50	4	1
63		
75		
85		

Tragschiene	TS 35
Länge (mm)	343
max. Bestückungslänge (mm)	302



Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.16 56 09</b>	PEXe 06085	160 x 560 x 91
<b>16.16 56 09</b>	PEXi 16085	160 x 560 x 91
<b>26.16 56 09</b>	PExB 26085	160 x 560 x 91


Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	123	100	83	63	50	42	34	34			
	1	1	1	1	1	1	1	1			
 x A	6										
	10	53									
	16	18	35	138							
	20	7	20	40							
	25		9	22	43						
	35			6	17	42					
	50				2	14	35				
	63					4	16	58			
	80						6	18	65		
	100							7	17		
	125								7		
	160										
	200										
	225										
	250										
	315										
400											
500											

M	Seite	
	A/B	C/D
12	112	18
16	58	8
20	40	6
25	24	3
32	12	2
40	8	1
50	6	1
63		
75		
85		

Tragschiene	TS 35
Länge (mm)	543
max. Bestückungslänge (mm)	508

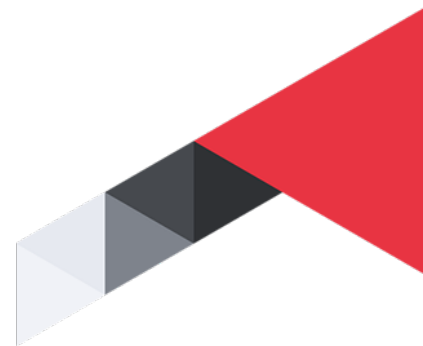





Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.25 26 12</b>	PEExe 06090	250 x 255 x 121
<b>16.25 26 12</b>	PEXi 16090	250 x 255 x 121
<b>26.25 26 12</b>	PExB 26090	250 x 255 x 121

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	102	82	68	52	21	17	14	14	10		
	2	2	2	2	1	1	1	1	1		
x A	6										
	10	70									
	16	24	47	182							
	20	10	27	52							
	25		13	30	57						
	35			8	22	56					
	50				3	18	46				
	63					6	21	76			
	80						8	24	85		
	100							10	22		
	125								9	22	
	160									7	
	200										
	225										
	250										
	315										
400											
500											

M	Seite	
	A/B	C/D
12	69	51
16	32	24
20	24	18
25	12	10
32	8	7
40	4	3
50	3	3
63	3	2
75		
85		

Tragschiene	TS 35
Länge (mm)	238
max. Bestückungslänge (mm)	197



Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.25 26 16</b>	PEExe 06095	250 x 255 x 161
<b>16.25 26 16</b>	PEXi 16095	250 x 255 x 161
<b>26.25 26 16</b>	PExB 26095	250 x 255 x 161

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95	
	102	82	68	52	21	17	14	14	10	8		
	2	2	2	2	1	1	1	1	1	1		
x A	6											
	10	82										
	16	28	54	211								
	20	11	31	61								
	25		15	34	67							
	35			10	26	65						
	50				3	21	54					
	63					7	25	88				
	80						9	27	99			
	100							12	26			
	125								10	26		
	160									9	23	
	200										8	
	225											3
	250											
	315											
400												
500												

M	Seite	
	A/B	C/D
12	69	51
16	32	24
20	24	18
25	12	10
32	8	7
40	4	3
50	3	3
63	3	2
75		
85		

Tragschiene	TS 35
Länge (mm)	238
max. Bestückungslänge (mm)	197





Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.25 40 12</b>	PEEx 06100	250 x 400 x 121
<b>16.25 40 12</b>	PEXi 16100	250 x 400 x 121
<b>26.25 40 12</b>	PExB 26100	250 x 400 x 121

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	170	138	116	86	35	29	23	23	18		
	2	2	2	2	1	1	1	1	1		
	6										
	10	76									
	16	26	50	197							
	20	10	29	57							
	25		14	32	62						
	35			9	24	60					
	50				3	19	50				
	63					6	23	82			
	80						9	26	92		
	100							11	24		
	125								9	24	
	160									8	
	200										
	225										
	250										
	315										
	400										
500											

M	Seite	
	A/B	C/D
12	117	50
16	56	22
20	42	18
25	21	10
32	14	6
40	7	3
50	5	2
63	5	2
75		
85		

Tragschiene	TS 35
Länge (mm)	381
max. Bestückungslänge (mm)	342



Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.25 40 16</b>	PEEx 06105	250 x 400 x 161
<b>16.25 40 16</b>	PEXi 16105	250 x 400 x 161
<b>26.25 40 16</b>	PExB 26105	250 x 400 x 161

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95	
	170	138	116	86	35	29	23	23	18	14		
	2	2	2	2	1	1	1	1	1	1		
	6											
	10	87										
	16	30	58	226								
	20	12	34	65								
	25		16	37	71							
	35			11	28	69						
	50				4	22	57					
	63					7	26	95				
	80						10	29	106			
	100							12	28			
	125								11	28		
	160									9	25	
	200										9	
	225											3
	250											
	315											
	400											
500												

M	Seite	
	A/B	C/D
12	117	50
16	56	22
20	42	18
25	21	10
32	14	6
40	7	3
50	5	2
63	5	2
75		
85		


Tragschiene	TS 35
Länge (mm)	381
max. Bestückungslänge (mm)	342





Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.25 60 12</b>	PExe 06110	250 x 600 x 121
<b>16.25 60 12</b>	PExi 16115	250 x 600 x 121
<b>26.25 60 12</b>	PExB 26110	250 x 600 x 121

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	266	214	180	136	54	45	36	36	28		
N	2	2	2	2	1	1	1	1	1		
x A	6										
	10	78									
	16	27	52	202							
	20	11	30	58							
	25		14	33	64						
	35			9	25	62					
	50				3	20	51				
	63					6	24	85			
	80						9	26	95		
	100							11	25		
	125								10	25	
	160									8	
	200										
	225										
	250										
	315										
400											
500											

M	Seite	
	A/B	C/D
12	108	50
16	52	24
20	36	18
25	30	10
32	12	7
40	6	3
50	4	3
63	4	2
75		
85		

Tragschiene	TS 35
Länge (mm)	581
max. Bestückungslänge (mm)	542



Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.36 36 09</b>	PExe 06115	360 x 360 x 91
<b>16.36 36 09</b>	PExi 16120	360 x 360 x 91
<b>26.36 36 09</b>	PExB 26115	360 x 360 x 91

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



	1,5	2,5	4	6	10	16	25	35	50	70	95
	228	183	153	78	62	52	42	42			
N	3	3	3	2	2	2	2	2			
x A	6										
	10	77									
	16	26	51	199							
	20	11	30	58							
	25		14	32	63						
	35			9	24	61					
	50				3	20	50				
	63					6	23	83			
	80						9	26	93		
	100							11	24		
	125								10		
	160										
	200										
	225										
	250										
	315										
400											
500											

M	Seite	
	A/B	C/D
12	72	52
16	38	24
20	26	20
25	16	10
32	7	6
40	5	5
50	4	
63		
75		
85		

Tragschiene	TS 35
Länge (mm)	343
max. Bestückungslänge (mm)	304





Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.41 40 12</b>	PEXe 06120	405 x 400 x 121
<b>16.41 40 12</b>	PEXi 16125	405 x 400 x 121
<b>26.41 40 12</b>	PExB 26120	405 x 400 x 121

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



M	Seite	
	A/B	C/D
12	117	95
16	56	46
20	42	36
25	21	18
32	14	13
40	7	6
50	5	5
63	5	4
75		
85		

Tragschiene	TS 35
Länge (mm)	381
max. Bestückungslänge (mm)	342

	1,5	2,5	4	6	10	16	25	35	50	70	95
	255	207	174	129	70	58	23	23	18		
	3	3	3	3	2	2	1	1	1		
	6										
	10	92									
	16	31	61	237							
	20	13	35	69							
	25		17	39	75						
	35			11	29	73					
	50				4	24	60				
	63					8	28	99			
	80						10	31	111		
	100							13	29		
	125								12	29	
	160									10	
	200										
	225										
	250										
	315										
	400										
500											



Bestell-Nr.	Typ	Abmessungen H x B x T (mm)
<b>06.41 40 20</b>	PEXe 06125	405 x 400 x 201
<b>16.41 40 20</b>	PEXi 16130	405 x 400 x 201
<b>26.41 40 20</b>	PExB 26125	405 x 400 x 201

Max. Bestückungsmöglichkeiten für Kabelverschraubungen nach DIN 50262



M	Seite	
	A/B	C/D
12	210	190
16	98	91
20	88	77
25	45	43
32	28	26
40	17	15
50	12	11
63	9	8
75		
85		

Tragschiene	TS 35
Länge (mm)	381
max. Bestückungslänge (mm)	342

	1,5	2,5	4	6	10	16	25	35	50	70	95	120	150	
	255	207	174	129	70	58	23	23	18	14	14	11	11	
	3	3	3	3	2	2	1	1	1	1	1	1	1	
	6													
	10	114												
	16	39	76	295										
	20	16	44	85										
	25		21	48	93									
	35			14	36	91								
	50				5	29	75							
	63					10	35	124						
	80						13	39	139					
	100							16	36					
	125								14	37				
	160									12	32			
	200										11	28	87	
	225										4	16	34	
	250											8	21	43
	315												4	12
	400													
500														

