



LED-Feuchtraumleuchte SPLIXX<sup>®</sup> 4000/5800 lm, 4000 K

4 046725 360469

**Leistungsmerkmale**

Die RED SPLIXX<sup>®</sup> LED Feuchtraumleuchte in zwei Leistungsstufen als Ersatz zu 1x58 W/2x58 W, Einsatz im Innen- und überdachten Außenbereich.

- Schutzart IP66, Schlagfestigkeit IK08
- Gehäuse aus grauem Polycarbonat, RAL 7035
- Diffusor aus opalisiertem, UV-stabilisiertem Polycarbonat
- Glühdrahtprüfung (EN 60695-2-11): 850 °C
- Stirnseitige Kabeleinführung
- unverlierbare Verschlussclipse aus Polyamid, Deckenbefestigung aus Edelstahl
- LED-Lebensdauer 35.000 Std. L70
- Bis zu 123 lm/W
- Schaltbares Netzteil on/off
- LED neutralweiß 4.000 K, CRI>80
- 5-polige Durchgangsverdrahtung als Zubehör  
DEHA-Nr.: 6001863
- 5 Jahre Garantie

**DEHA Nummer**

5935846  
5935847

**Artikelnummer**

5640-30-0001  
5640-30-0002

**EAN-Nummer**

4046725360469  
4046725360476

**Kennzeichnung**IP  
66V  
200-240°C  
-25...+35

35.000h

K  
4.000CRI  
>80Made  
in  
EU**MORE  
RED  
LESS  
PLASTIC**

## LED-Feuchtraumleuchte SPLIXX<sup>®</sup> 4000/5800 lm, 4000 K

### Allgemeine Daten

Elektrische Daten	5935846	5935847
LxBxH	1573x101x101 mm	1573x101x101 mm
Leistung	30 W	45 W
LED-Modul	1x1500 mm	1x1500 mm
Lichtstrom	4000 lm	5800 lm
Farbtemperatur	4000 K	4000 K
Gewicht	2,0 kg	2,5 kg
Eingangsspannung	AC 220-240 V	
Anschlussart	3-polige schraubenlose Klemme	


### Mechanische Daten

Gehäuse	Polycarbonat-Spritzguss grau RAL 7035
Diffusor	Opal Polycarbonat mit UV-Schutz
Geräteträger	Weiß lackiertes Stahlblech
Verschlussclips	Polyamid 6, unabnehmbar
Kabeleinführung	Wasserdichte Verschlusskappe
Befestigungsclips	Edelstahl
Lebensdauer	35.000 Stunden L70
Brandschutz	Entflammbarkeit (UL94): V2 Glühdrahtprüfung (EN 60695-2-11): 850°

### Bestelldaten

DEHA-Nr.	Type	EAN	Farbe	VPE
5935846	5640-30-0001 LED-FR-Leuchte 4000 lm	4046725360469	grau	1 Stk.
5935847	5640-30-0002 LED-FR-Leuchte 5800 lm	4046725360476	grau	1 Stk.

Technische Änderungen vorbehalten.

LED moisture-proof luminaire SPLIXX<sup>®</sup>  
4000/5800 lm, 4000 K**Performance features**

The RED SPLIXX<sup>®</sup> LED moisture-proof luminaire are available in two power levels as a replacement to 1x58 W/2x58 W, to use indoor and in covered outdoor areas.

- Protection class IP66, impact resistance IK08
- Housing made of gray polycarbonate, RAL 7035
- Diffuser made of opal, UV stabilized Polycarbonate
- Glow wire test (EN 60695-2-11): 850 °C
- Cable entry at the front
- captive looking clips made of polyamide; Ceiling mounting made of stainless steel
- LED service life 35.000 hours L70
- Up to 123 lm/W
- Switchable power supply on/off
- LED neutral white 4.000 K, CRI>80
- 5-pole through wiring as an accessory DEHA no. 6001863
- 5-year guarantee

**DEHA number**


5935846  
5935847

**Item number**

5640-30-0001  
5640-30-0002

**EAN**

4046725360469  
4046725360476

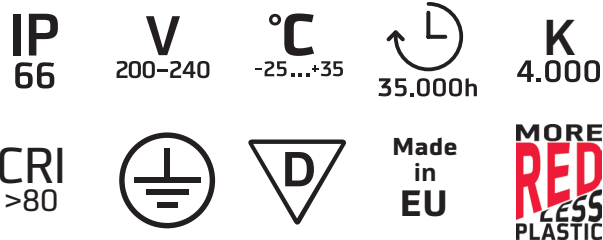**label**

## LED moisture-proof luminaire SPLIXX<sup>®</sup> 4000/5800 lm, 4000 K

### General data

Electrical data	5935846	5935847
LxWxH	1573x101x101 mm	1573x101x101 mm
Performance	30 W	45 W
LED module	1x1500 mm	1x1500 mm
Luminous flux	4000 lm	5800 lm
Colour temperature	4000 K	4000 K
Weight	2,0 kg	2,5 kg
Input voltage	AC 220-240 V	
Connection type	3-pole screwless terminal	

### Mechanical data

Casing	Injection molded polycarbonate, grey RAL 7035
Diffuser	Opal polycarbonate with UV protection
Equipment carrier	white painted sheet steel
Locking clips	Polyamid 6, not removable
Cable entry	waterproof cap
Fastening clips	Stainless steel
Lifespan	35.000 hours L70
Fire protection	Flammability (UL94): V2 Glow wire test (EN 60695-2-11): 850°

### Order Data

DEHA no	Type	Item number	EAN	VPE
5935846	LED-FR-Leuchte 4000 lm	5640-30-0001	4046725360469	1 Piece
5935847	LED-FR-Leuchte 5800 lm	5640-30-0002	4046725360476	1 Piece

Subject to change w/o notice

Verpackungsregisternr. DE3513737456573; WEEE-Reg.-Nr. DE 89717721

DEHA Elektrohandelsgesellschaft mbH & Co.KG, Weilimdorfer Str. 74/2, 70839 Gerlingen, Germany

www.deha.de

www.wir-sind-red.de