
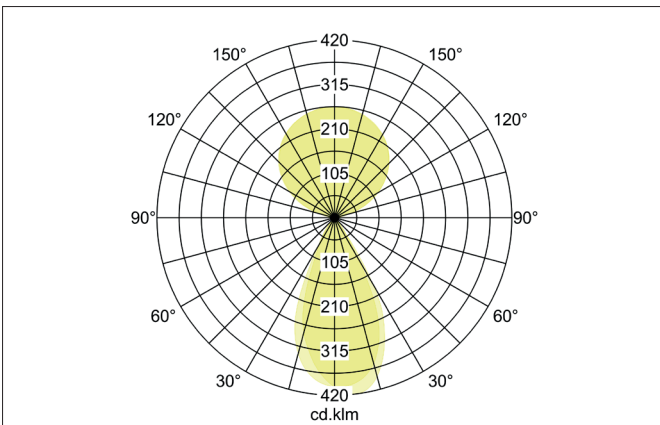


BEVON LED floor luminaire, microprismatic cover, with indirect light component

Article no. 7745 1694

Light.
For Generations.

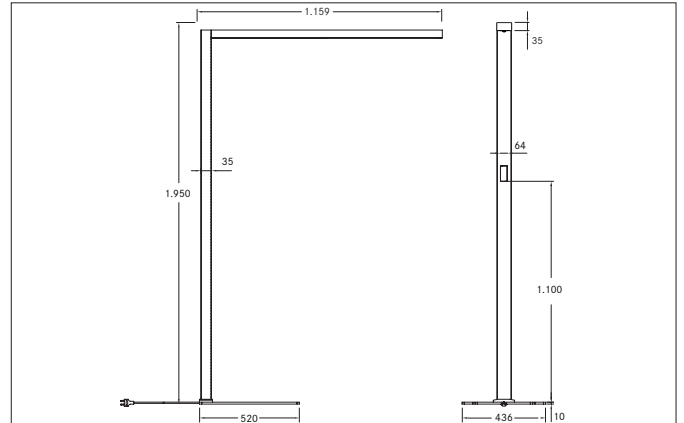

Tender
LED floor luminaire, microprismatic cover, with indirect light component, Rectangular. Luminaire length 1203.0 mm, Luminaire width 65.0 mm, Height 1960.0 mm Weight 14.0 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, opal cover. Luminous flux 7.200 lm, Power 2 x 60 W, Light colour neutral white, Correlated color temperature (CCT) 4.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Steel / Plastic, Colour: Silver structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20, .With electronic driver, Presence detector dimmable.

| Article data | |
|-------------------|--|
| Article no. | 77451694 |
| GTIN | 4251433983033 |
| Series name | BEVON |
| Short description | LED floor luminaire, microprismatic cover, with indirect light component |
| Material | Aluminium / Steel / Plastic |
| Colour | Silver |
| Type of surface | Structure |
| Shape | Rectangular |
| Length | 1,203 mm |
| Width | 65 mm |
| Hight | 1960 mm |
| Scope of delivery | Delivery: incl. supply line 2500 mm with protective contact angle plug</P></TEXT>. |
| Weight | 14.000 kg |

BEVON LED floor luminaire, microprismatic cover, with indirect light component

Article no. 77451694

Light.
For Generations.

| Lighting technology | |
|------------------------------|-----------------|
| Colour temperature | 4.000 K |
| Light colour | White |
| Light output | Direct/Indirect |
| Luminous flux | 7,200 lm |
| System efficiency | 120 lm/W |
| Colour rendering | CRI > 80 |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 60 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequenz max. | 50 Hz |
| Lamp | LED exchangeable |
| Lamp holder | Without fitting |
| Protection class | I |
| Degree of protection | IP20 |
| Control | Presence detector, Daylight detector, Button |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology | |
|-----------------------|------------------|
| Mounting method | Surface mounting |
| Place of installation | Floor-mounted |
| Adjustability | Not adjustable |
| Material cover | Plastic, opal |

| Packing data | |
|-------------------------|---|
| Gross weight | 16 kg |
| Length of packaging | 2,300 mm |
| Packaging width | 310 mm |
| Packaging height | 110 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |