


## connector - with screwless terminals, lockable

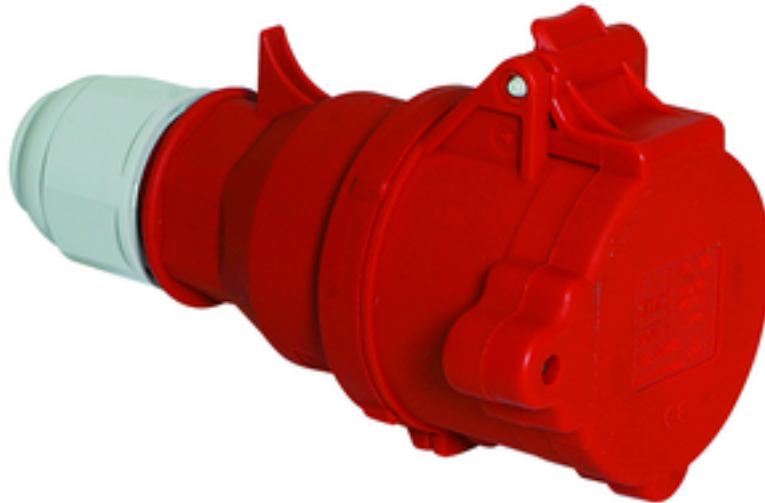


Product description	
BALS-Prd.-Nr	310635
EAN	4024941197540
Product category	QUICK-CONNECT connector
Current	32A
Number of poles	5p
Arrangement of phases	3p+N+PE
Position of earth contact	6 h
Voltage	200/346 - 240/415V~
Frequency	50/60Hz

Product description	
Protection degree	IP44
Colour code	red RAL 3000
Colour of appliance	Hinged lid red RAL 3000, Cable gland grey RAL 7035, Housing cover red RAL 3000, Collar red RAL 3000
Connection design	screwless spring-clamp technology
Maximum conductor size	6,0 qmm
Cable entry	with cable gland
Height	188mm
Width	92mm
Depth	102mm
Material of enclosure	Polyamide
Contacts	The contact carrier is made of polyamide, the contacts are brass nickel plated

Additional technical properties	
	For cable diameter from 11 up to max. 23,5 mm, Screwless housing connection with snap fastening, Multi-Grip cable gland with gasket and integrated strain relief, The connector is lockable with the plug art.-no. 210951 and padlock art.no. 580642

Logistics data	
Weight/pcs	0.297 kg / Piece
Packaging	Bag
Content amount	1 ST

Logistics data	
EAN	4024941197540
Length	102 mm
Width	92 mm
Height	188 mm
Weight	0.298 kg
Volume	1,764.192 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941825665
Length	325 mm
Width	217 mm
Height	210 mm
Weight	3.176 kg
Volume	13,588.4 ccm

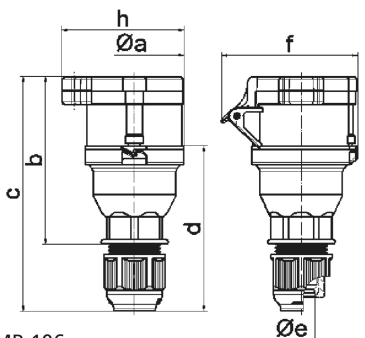

Ampere	16	32				
Polzahl	5	5				
a ø	66,0	74,5				
b	113,5	134,5				
c	154,0	187,0				
d	105,5	128,5				
e ø	18,0	23,0				
f	86,0	97,0				
h	82,0	100,0				
Leiter mm <sup>2</sup> min	1	2,5				
Leiter mm <sup>2</sup> max	2,5	6				

3 MB 106