


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

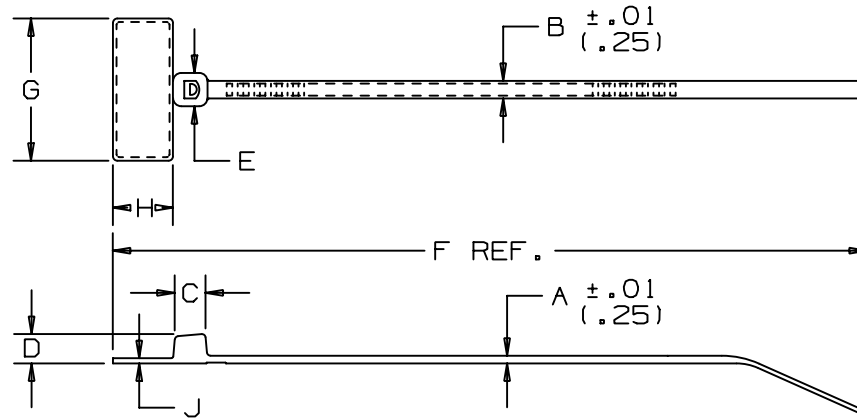

PANDUIT * PART NO.	BUNDLE DIA.		A IN. (mm)	B IN. (mm)	C IN. (mm)	D IN. (mm)	E IN. (mm)	F IN. (mm)	G IN. (mm)	H IN. (mm)	J IN. (mm)	WRITE-ON AREA IN. (mm)	MINIMUM LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT lbs/100pcs. (g)
	MIN IN. (mm)	MAX IN. (mm)													
PLF1M-69	.06 (1.5)	.87 (22.1)	.045 (1.1)	.098 (2.5)	.177 (4.5)	.154 (3.9)	.180 (4.6)	4.3 (109)	.812 (20.6)	.366 (9.3)	.028 (.71)	.31 x .75 (7.9 x 19.1)	18 (80)	MINIATURE	.10 (46)

NOTES:

- *1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- 2) RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.
- 3) MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING OF 248°F (120°C).
- 4) MATERIAL FLAMMABILITY RATING: UL94V-0.
- 5) MINIMUM LOOP TENSILE RATING AT 120°F (49°C)/20% RH.
- 6) COLOR: NATURAL--OFF WHITE.

										DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS					
										<h1 style="margin: 0;">PANDUIT</h1> <p style="margin: 0;">CORP. TINLEY PARK, ILLINOIS</p> <p style="margin: 0;">PAN-TY FLAG MARKER TIE FLAME RETARDANT SERIES</p> <p style="margin: 0; font-size: small;">UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± ---- (.XXX) ± .020(.51) (.XX) ± .02(.5) ANGLES ± ----</p> <p style="margin: 0; font-size: small;">UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.</p>					
										DRAWN BY R. MARCUS	MAT'L; FLAME RETARDANT NYLON 6/6		SCALE NONE		
2	7/19/02	JABO		ADDED "WRITE-ON AREA"		26822	2			DATE 5-19-93			DRAWING NO. SS-26822	DWG SIZE A	
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP		CHK'D HVP					