




223-PC

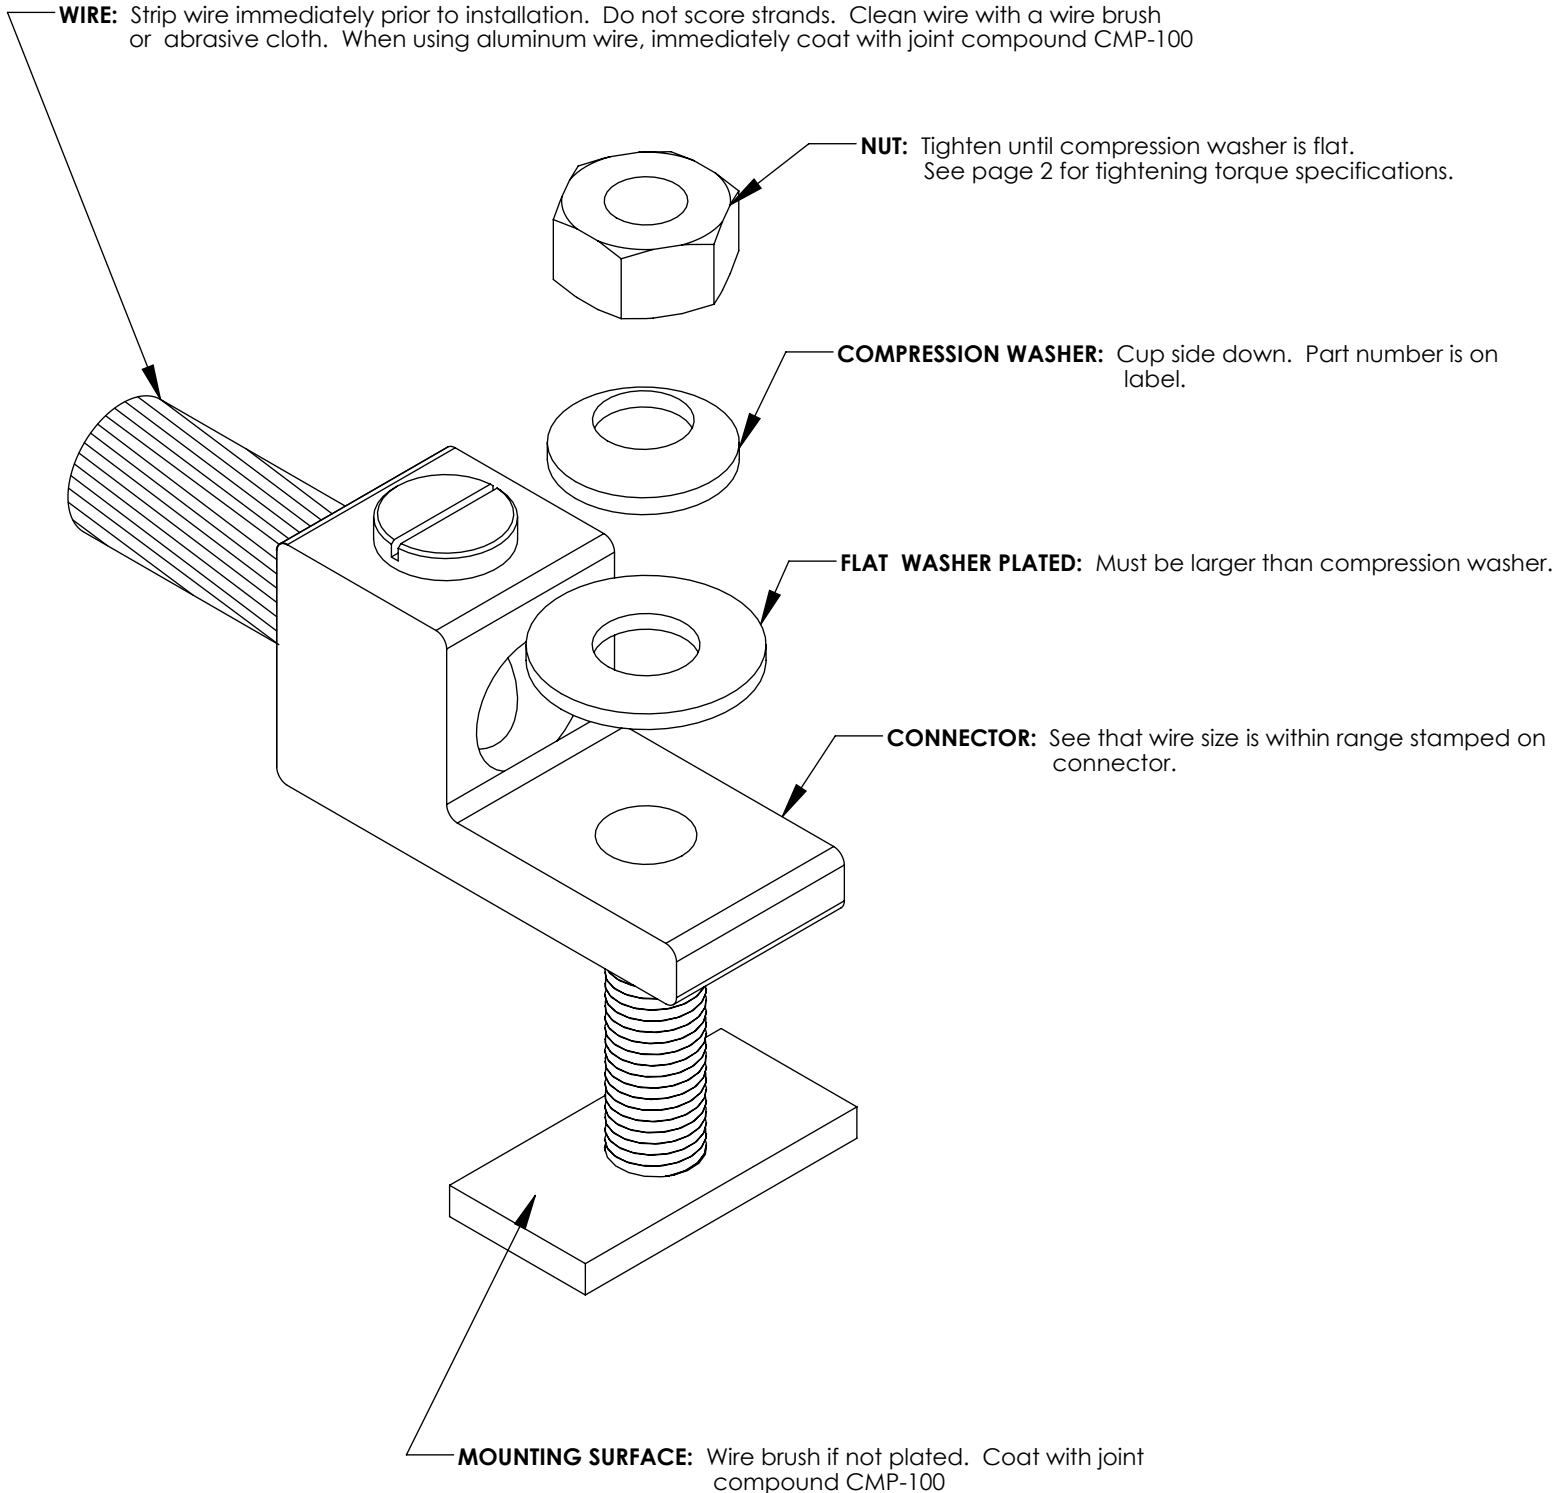

**Torque Chart for Aluminum Mechanical Connectors
Types LAMA, LAMB, LAM2A, LAM2B, LAM2SB, LAM3B, LAM3SB, LAM3D,
LAM4SB, LAM4D**

Panduit Part Number	AWG or CIRCULAR MILL SIZE	TIGHTENING TORQUE INCH-LBS	TIGHTENING TORQUE N-M
LAMA6-14-QY	10-14 8 6	20 25 35	2.3 2.8 4.0
LAMA2-14-QY	10-14 8 4-6 2-3	35 40 45 50	4 4.5 5.1 5.6
LAMA1/0-56-Q	10-14 8 4-6 1/0-3	35 40 45 50	4 4.5 5.1 5.6
LAMA1/0-14-QY	10-14 8 4-6 1/0-3	35 40 45 50	4 4.5 5.1 5.6
LAMA2/0-14-QY	2/0-14	120	13.6
LAMA250-56-QY	250-6	275	31.1
LAMA300-56-QY	300-6	275	31.1
LAMA350-38-QY	350-6	275	31.1
LAMA500-38-6Y	500-4	500	56.5
LAMA600-38-6Y	600-2	500	56.5
LAMA600S-38-6Y	600-4 (2)250-1/0	550	62.1
LAMA1000-58-6Y	1000-500	550	62.1
LAMB350-12-6Y	350-6	275	31.1
LAMB600-12-3Y	600-2	500	56.5
LAMLB1000-12-3	500-1000	550	62.1
LAM2A1/0-14-6Y	10-14 8 4-6 1/0-3	35 40 45 50	4 4.5 5.1 5.6
LAM2A2/0-14-6Y	2/0-14	120	13.6
LAM2A250-38-6Y	250-6	275	31.1
LAM2A350-12-6Y	350-6	275	31.1
LAM2A600-12-6Y	600-2	550	62.1
LAM2A1000-58-6Y	1000-500	550	62.1
LAM2SA300-56-3	300-6	275	31.1
LAM2B350-12-3Y	350-6	275	31.1
LAM2LB600-12-3	600-2	375	42.4
LAM2LB1000-12-3	1000-500	500	56.5
LAM2SB600-38-1Y	600-2	375	42.4
LAM2SB750-38-1Y	750-1/0	375	42.4
LAM2SSB500-141Y	500-4/0	500	56.5
LAM3B2-56-6Y	10-14 8 4-6 2-3	35 40 45 50	4 4.5 5.1 5.6
LAM3B1/0-38-6Y	10-14 8 4-6 1/0-3	35 40 45 50	4 4.5 5.1 5.6
LAM3B3/0-12-3Y	3/0-6	200	22.6
LAM3B250-12-1Y	250-6	275	31.1
LAM3B350-12-1Y	350-6	275	31.1
LAM3LB600-12-1	600-2	375	42.4
LAM3LB1000-121Y	1000-500	500	56.5
LAM3D3/0-12-3Y	3/0-6	200	22.6
LAM3D250-12-1Y	250-6	275	31.1
LAM3D350-12-1Y	350-6	275	31.1
LAM3LD600-12 -1	600-2	375	42.4
LAM3LD1000-121Y	1000-500	500	56.5
LAM4SB600-38-1Y	600-2	375	42.4
LAM4SB750-38-1Y	750-1/0	375	42.4
LAM4D250-12-1Y	250-6	275	31.1
LAM4D350-12-1Y	350-6	275	31.1
LAM4LD600-12 -1	600-2	375	42.4
LAM4LD1000-12-1	1000-500	500	56.5

For Instructions in Local Languages
and Technical Support:



E-mail:
cs@panduit.com

Fax:
708-444-6993