THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

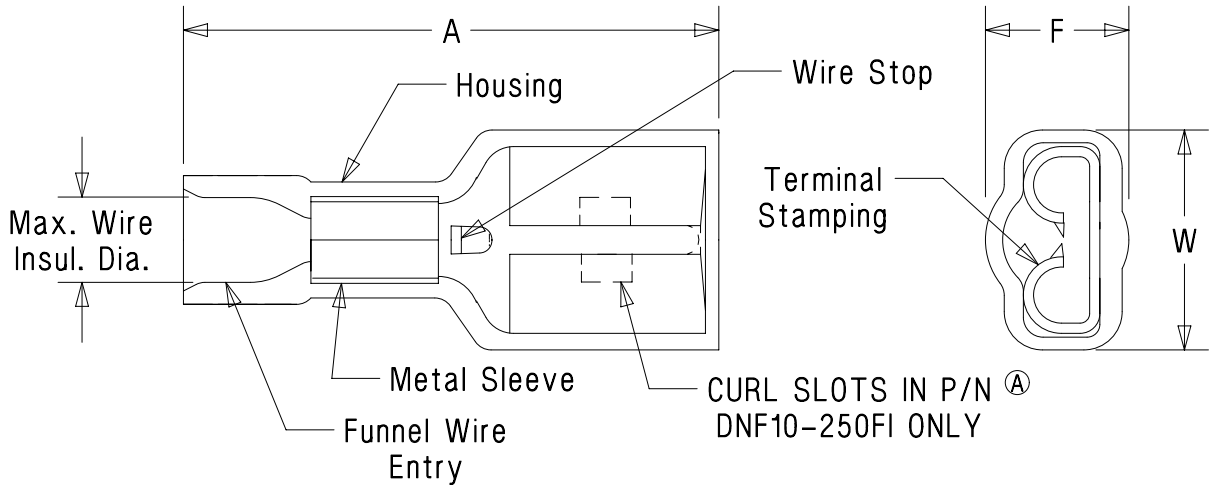

Notes:

1. 600V max voltage rating
2. 257°F (125°C) max temperature rating of insulation material .
3. Stranded copper wire only
4. Material:
   A. Stamping – brass, tin plated
   B. Sleeve – copper or brass, tin plated.
   C. Housing – Nylon type 6/6. Colors are translucent.
5. SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
6. Dimensions in bracket are in mm Or mm^2

CERTIFIED
LR31212

LISTED
20H3
E78522

Base part number	Wire range AWG (mm^2)	Tab size	Housing color	A ±.03 (,8)	W ±.02 (,5)	Max. Insul.	F ±.02 (,5)	Wire Strip length +1/32, -0 (+0,8, -0)	Crimp tools
DNF18-250FI	22-18 (0,5-1,0)	.250X.032 (6,3X,8)	Red	.94 (23,9)	.36 (9,1)	.14 (3,6)	.21 (5,3)	9/32 (7.1)	CT-100A CT-600-A CT-1550 CT-1551 CT-2400 W/CT-2455 CRIMP HEAD CT-2500
DNF14-250FI	16-14 (1,5-2,5)	.250X.032 (6,3X,8)	Blue	.94 (23,9)	.36 (9,1)	.16 (4,1)	.24 (6,1)		
DNF10-250FI	12-10 (4,0-6,0)	.250X.032 (6,3X,8)	Yellow	.95 (24,1)	.36 (9,1)	.22 (5,6)	.27 (6,9)	3/8 (9.5)	CT-100, CT-100A, CT-460, CT-550 CT-600-A, CT-1551, CT-2500

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
07	10-17-18	BWG	SKB	JADE	Corrected DNF10-250FI Wire Strip length and updated Title Border.	041853/00
06	8/11	SHOR			MODIFIED NOTE #5, ADDED INSTALLATION TOOLS	
04	1/10	LM			Removed hidden lines for clarity	

TITLE
FULLY INSULATED (STD NYLON)- FEMALE DISCONNECTS - SLEEVED BARREL (LOOSE PIECE)
CUSTOMER DRAWING

ITEM REVISION NAME: N41672BA/07
DATASET FILE NAME: N41672BA/07

PANDUIT

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ±
.XX ± ANGLES ±
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTE #4

DRAWING NUMBER: A41672

DRAWN BY	DATE	CHK	SCALE		SIZE
ES			NONE	SHT 1 OF 1	A

D10100DA/20