

8523/82-06-040 Art. No. 217741



- Safe switching to protect Ex e motors
- Release: Non-adjustable fast short-circuit release, adjustable thermal overcurrent release
- Optional undervoltage release and shunt trip
- Optional auxiliary contacts: 1 NC + 1 NO or 2 NC + 2 NO

WebCode **8523A**



R. STAHL Series 8523/8 motor protection moulded case circuit breakers are equipped with a non-adjustable fast short-circuit release and a thermal overcurrent release adjustable at the switch. The switches are operated via a rotary actuator, whereby the switch position is always easy to see. You can set the various current ranges.

Technical Data

Explosion Protection

Application range (zones)	1 2
IECEX gas certificate	IECEX BVS 08.0039U
IECEX gas explosion protection	Ex db eb IIC Gb
IECEX firedamp certificate	IECEX BVS 08.0039U
IECEX firedamp protection	Ex db eb I Mb
ATEX gas certificate	DMT 01 ATEX E 153 U
ATEX gas explosion protection	Ex II 2 G Ex db eb IIC Gb
ATEX firedamp certificate	DMT 01 ATEX E 153 U
ATEX firedamp protection	Ex I M2 Ex db eb I Mb
Certificates	ATEX (BVS), Brazil (ULB), Canada (FM), EAC (ENDCE), IECEX (BVS), USA (FM)

Electrical Data

Rated operational voltage AC	690 V
Frequency	50/60 Hz
Switching capacity	12.5 kW/400 V
Current-setting range	1 – 1.6 A
Auxiliary contacts	2 NC + 2 NO
Rated operating voltage HIKO	500 V
Release	without
No. of poles	3

Ambient Conditions

Ambient temperature	-20 °C ... +40 °C
---------------------	-------------------

Mechanical Data


Enclosure material	Epoxy resin or polyester resin
Min. connection cross section	1.5 mm ²
Max. connection cross section, solid	10 mm ²

8523/82-06-040 Art. No. 217741

Mechanical Data

Max. connection cross-section, finely stranded	10 mm ²
Min. auxiliary contact cross-section	0.75 mm ²
Max. auxiliary contact connection cross-section, solid	2.5 mm ²
Max. auxiliary contact connection cross section, finely stranded	1.5 mm ²
Service life, min.	10 ⁵ operating cycles
Enclosure size	130 mm x 115 mm x 110.5 mm
Weight	1.9 kg
Weight	4.19 lb

Technical Drawings – Subject to Alterations

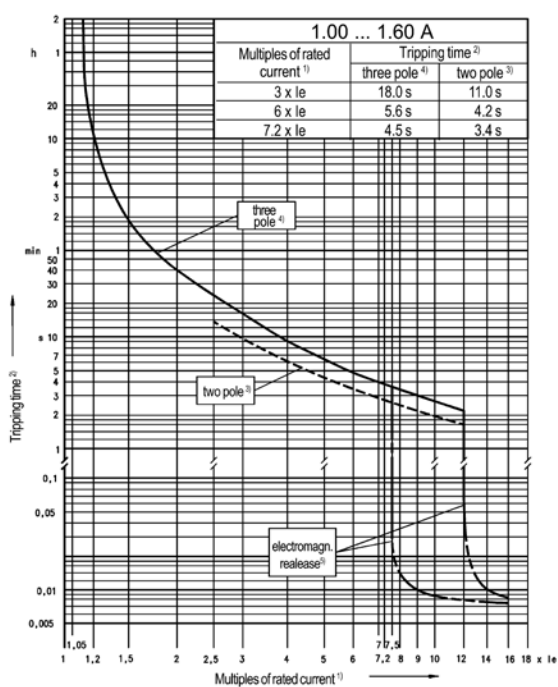

¹⁾ Multiples of the nominal current

²⁾ Tripping time


³⁾ 2 pole

⁴⁾ 3 pole

⁵⁾ Electromagnetic release

8523/82-06-040 Art. No. 217741

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

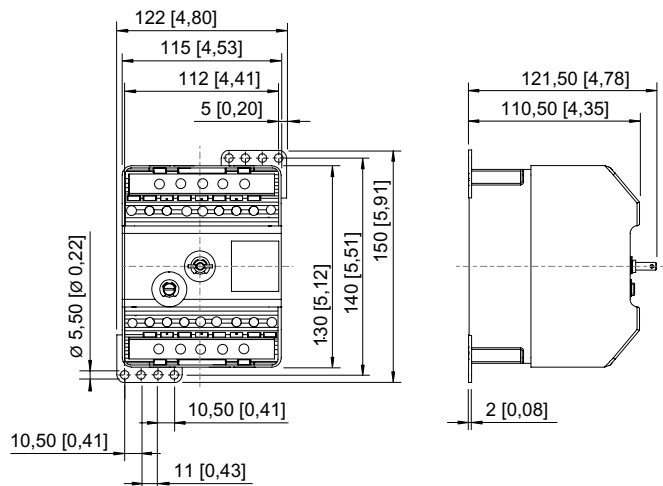

8523/82
 Circuit-breaker for motor protection
 Module width 2, with auxiliary contacts

Accessories

Jumper



for undervoltage trip, length: 300 mm
 (two jumpers required)

Art. No.

147121

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.