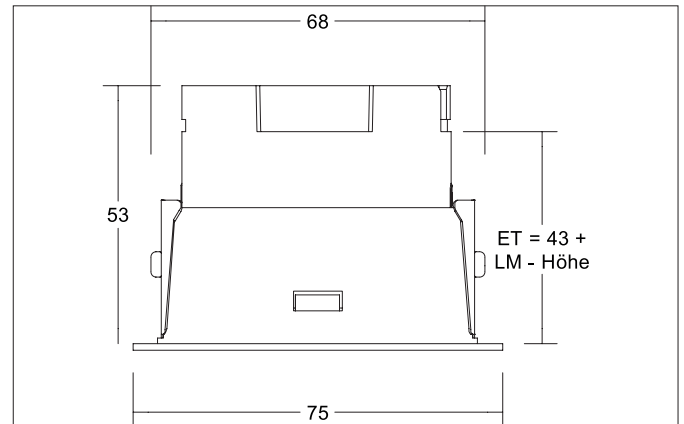


**BINATO LED recessed spot, rotatable and pivoted, without LED module**

Article no. 20173550

Light.  
For Generations.**Tender**

LED recessed spot, rotatable and pivoted, without LED module, white structure / inside black matt, Round. In a compact design, for installation in tool-less rapid assembly systems. All Brumberg MR16 LED modules can be used for the BINATO recessed unit. The installation depth of the luminaire depends on the LED module used in each case (here: 43 mm, plus height of the LED module). The LED module is not included in the scope of delivery of the flush-mount unit. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Power: 14 W, Adjustability: Rotatable and pivoted, without control gear, Dimmable: Depending on type of control gear, Control: Depending on driver.

**Product Benefits**

- High color variance.
- Rotatable and pivoted.
- Leaf spring mounting.
- Interchangeable inner ring with clear glass cover .
- Color variants black and white also available as complete set with trailing-edge phase dimmable converter or DALI converter.
- DALI variant with connection box in set.

**BINATO LED recessed spot, rotatable and pivoted, without LED module**

Article no. 20173550

Light.  
For Generations.

Article data	
Article no.	20173550
GTIN	4251433981589
Series name	BINATO
Short description	LED recessed spot, rotatable and pivoted, without LED module
Material	Aluminium / Plastic
Colour	White / Black
Type of surface	Structure
Shape	Round
Outer diameter	75 mm
Built-in diameter	68 mm
Hight	2 mm
Scope of delivery	incl. leaf spring mounting
Weight	0.078 kg

Lighting technology	
Colour temperature	Je nach verwendetem Brumberg MR16-LED-Modul
Light output	Direct
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	14 W
Voltage type	DC
Lamp	For LED
Protection class	III
Degree of protection	IP20
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	Yes

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Rotatable and pivoted
Swivel angle	30°
Rotation angle	355°
Max. ceiling thickness	25 mm
Further references	No cover with thermal insulation material
Material cover	Glass transparent
Circlip	Without circlip

Packing data	
Gross weight	0.11 kg
Length of packaging	85 mm
Packaging width	85 mm
Packaging hight	70 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.