


# DIN 46320-7-ZWI (metr. + PG)

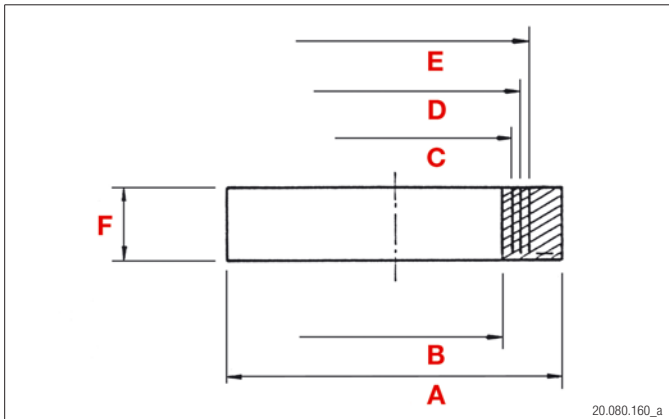

**MAT**  
Weichgummi 60  
Caoutchouc 60  
Rubber 60

**RoHS**

**TEMP**  
-40°C bis +60°C  
-40°C à +60°C  
-40°C to +60°C

## Dichtring DIN 46320-7-ZWI











Ausschneidbar, beständig gegen Benzin und Mineralöl.

## Garniture DIN 56320-7-ZWI

Lamellée à découper, résistante aux essences et huiles minérales.

## Seal ring DIN 46320-7-ZWI

Multiperforated, resistant to gasoline and mineral oils.

NORM metr.	NORM PG	A mm	B mm	C mm	D mm	E mm	F mm			Plica-Nr.	E-Nr.	VE
M16	PG9	13.3	5.0	7.5	10.0	-	5.5			91.8107.092	121 950 189	100
M20	PG11	16.5	5.0	7.5	10.0	12.5	6.0			91.8107.114	121 950 289	100
	PG13.5	18.3	7.5	10.0	12.5	-	6.0			91.8107.130	121 950 389	100
M25	PG16	20.4	7.5	10.0	12.5	15.0	7.0			91.8107.165	121 950 489	100
M32	PG21	25.9	10.0	13.0	16.0	19.0	8.0			91.8107.211	121 950 589	100
M40	PG29	34.7	18.0	21.0	24.0	27.0	9.5			91.8107.297	121 950 689	50
M50	PG36	44.7	24.0	27.0	30.0	33.0	12.0			91.8107.360	121 950 789	25
M63	PG42	51.7	30.0	33.0	36.0	39.0	14.0			91.8107.424	121 951 989	25
M75	PG48	56.9	36.0	39.0	42.0	45.0	14.0			91.8107.483	121 950 889	10