
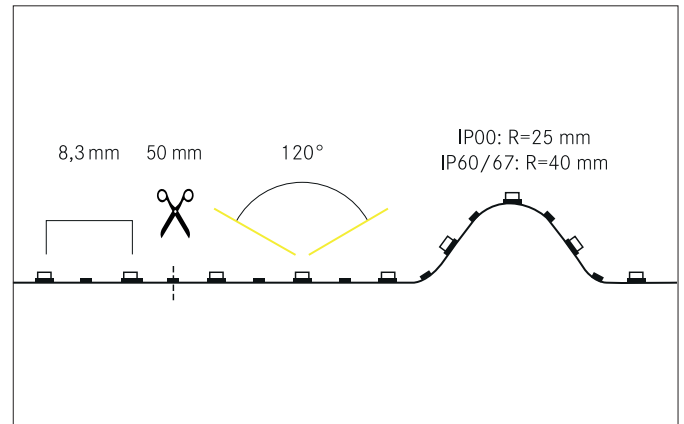


QUALITYFLEX SPECIAL APPLICATIONS QualityFlex Special Applications, TunableWhite, 19,2 W / m, IP60
 Artikel-Nr. 15225004

Licht.
Für Generationen.

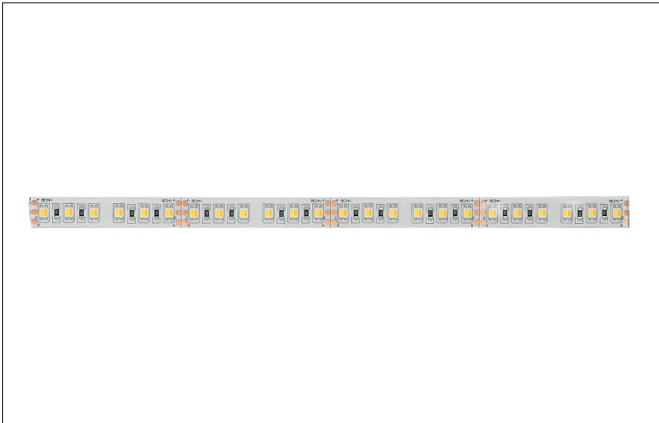

Tender

QualityFlex Special Applications, TunableWhite, 19,2 W / m, IP60, tunablewhite, 5.700K-2.700K, CRI > 80. LED flex lighting for Länge: 5000.0 mm Lampenleistung je Meter: 19.2 W/m, Lichtstrom je Meter: 718.0 lm/m, Schutzart raumseitig: IP60, Schutzklasse: III, Spannung: 24V, Abstrahlwinkel: 120.0°, 120 LEDs pro Meter, Chip-Abstand (Short Pitch) : 8,3mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 50 mm eingekürzt werden. Bei Kürzung der LED-Flexplatine muss der IP-Schutz bauseits wiederhergestellt werden. Die maximale Systemlänge von 5.000mm darf mit einer Einspeisung nicht überschritten werden.

Product Benefits

- Mit 2-Kanal-Dimmung lassen sich Farbtemperatur und Helligkeit verändern.
- Optimal Steuerbar über DALI (DT8) oder TunableWhite Funk-Fernbedienung.
- Schutzart: IP60
- Farbtemperatur: 3.000 Kelvin bis 6.000 Kelvin.
- Abstrahlwinkel: 120°.

QUALITYFLEX SPECIAL APPLICATIONS QualityFlex Special Applications, TunableWhite, 19,2 W / m, IP60

Artikel-Nr. 15225004

Licht.
Für Generationen.

Article data	
Artikel-Nr.	15225004
GTIN	425 1433923039
Series name	QUALITYFLEX SPECIAL APPLICATIONS
Kurzbeschreibung	QualityFlex Special Applications, TunableWhite, 19,2 W / m, IP60
Colour	TunableWhite
Length	5,000 mm
Width	10 mm
Hight	3.2 mm
Scope of delivery	inkl. 1 x Montageanleitung, 5 x Kennzeichnungsetiketten
weight	0.203 kg
Length of the connection line	350 mm

Lighting technology	
Colour temperature	3000 - 6000 K
Light colour	White
Lichtstrom 1	700 lm
Colour rendering	CRI > 80
Beam angle	120 °

Operating technology of the luminaires	
Lamp power per meter	19.2 W/m
Voltage type	DC
DC nominal voltage max	24 V
Lamp	LED
Protection class	III
Degree of protection	IP60
Ambient temperature	-10 °C bis +40 °C
Wire number	3
Control	Dimming depending on driver
Length of the connection line	350 mm
Ausführung der Anschlussleitung	beidseitig
Leuchtmittelwechsel möglich	No

Operating technology of QualityFlex	
Short Pitch	8.3 mm
Number of lamps per meter	120 Qty
Length of individual sections	50 mm
Smallest bend radius	40 mm
Control	Negative (3-core)
Length	5,000 mm
Maximum module length	5,000 mm
LED Type	3527 LED

Packing data	
Gross weight	0.227 kg
Length of packaging	220 mm
Packaging width	240 mm
Packaging height	20 mm

QUALITYFLEX SPECIAL APPLICATIONS QualityFlex Special Applications, TunableWhite, 19,2 W / m, IP60

Artikel-Nr. 15225004

Licht.
Für Generationen.

Compatible Driver						
	Power min	Power	Control	Length	Width	Height
17206000	1 W	20 W	1-10 V	146 mm	55 mm	19 mm
17207000	1 W	30 W	on/off	160 mm	50 mm	22 mm
17214000	1 W	7.2 W	on/off	68 mm	35 mm	21 mm
17223000	1 W	75 W	on/off	185 mm	60 mm	31 mm
17224000	1 W	100 W	on/off	199 mm	63 mm	36 mm
17225000	1 W	150 W	on/off	219 mm	63 mm	36 mm
17226000	1 W	240 W	on/off	244 mm	71 mm	38 mm
17240000			on/off			

Compatible Controller						
Artikel-Nr.	Power min	Power	Control	Length	Width	Height
18151000	24 W	240 W	KNX	170 mm	54 mm	30 mm
18155000	24 W	240 W	DALI	170 mm	54 mm	30 mm
18153000	24 W	240 W	DMX	170 mm	54 mm	30 mm
18154000	24 W	240 W	1-10 V	170 mm	54 mm	30 mm
18156000			1-10 V	167 mm	51 mm	23 mm
18157000	48 W	240 W	Zigbee	145 mm	46.5 mm	16 mm
18207000				137 mm	45 mm	13 mm
18161000	24 W	240 W	KNX	72 mm	90 mm	70 mm
18164000	24 W	240 W	1-10 V	54 mm	110 mm	66 mm
18165000	24 W	240 W	DALI	54 mm	110 mm	66 mm
17518000	1 W	240 W	Wireless technology control			
18192000	120 W	240 W	Wireless technology control	160 mm	45 mm	18 mm
18198000						

Compatible Profiles				
Kurzbeschreibung	Series name	Length	Width	Height
Surface-mounted profile P02-10	P02-10	2,000 mm	17.5 mm	25 mm
Surface-mounted profile P03-12	P03-12	2,000 mm	17.8 mm	10.8 mm
Surface-mounted profile P04-14	P04-14	2,000 mm	24 mm	9 mm
Surface-mounted profile P06-20	P06-20	2,000 mm	23 mm	25.1 mm
Wall recessed profile P32-12	P32-12	2,000 mm	19.1 mm	81 mm
Floor recessed profile P33-12	P33-12	2,000 mm	15.8 mm	13.7 mm
Recessed profile P36-20	P36-20	2,000 mm	30 mm	20.4 mm
Plaster profile P37-30	P37-30	2,000 mm	63.4 mm	15.9 mm
Plaster profile P38-30	P38-30	2,000 mm	63.4 mm	24 mm
Surface-mounted corner profile P62-14	P62-14	2,000 mm	24 mm	19.4 mm
Flexible profile P72-12	P72-12	2,000 mm	20 mm	3.3 mm
Wall surface-mounted profile P73-12	P73-12	2,000 mm	17.8 mm	46.1 mm
Wall surface-mounted profile P74-14	P74-14	2,000 mm	18.5 mm	55 mm
Ceiling recessed profile with wall mounting P75-14	P75-14	2,000 mm	28 mm	28 mm
Glass edge profile P77-10	P77-10	2,000 mm	15.6 mm	22.5 mm