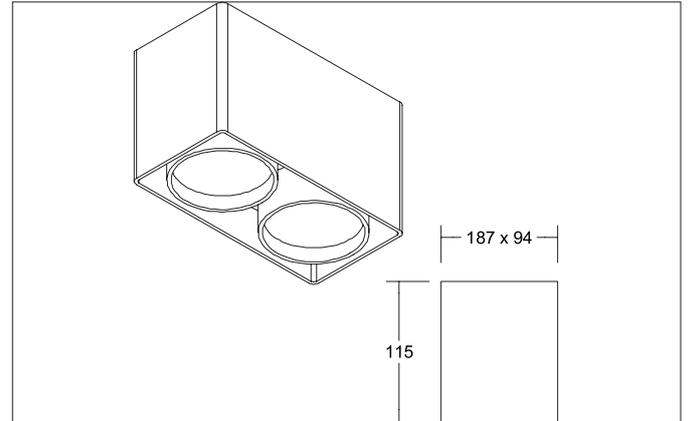


**IMPLEMENT LED surface mounted downlight, 2-x, trailing-edge phase dimmable**

Article no. 12393173

Light.  
For Generations.**Tender**

LED surface mounted downlight, 2-x, trailing-edge phase dimmable, Rectangular. Luminaire length 187.0 mm, Luminaire width 94.0 mm, Hight 115.0 mm Weight 0.837 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, transparent cover. Luminous flux 1.460 lm, Power 2 x 8,9 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 90, Housing material: Aluminium / Plastic, Colour: White structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20, .With electronic driver, Trailing-edge phase dimmable.

**Product Benefits**

- Ceiling surface-mounted luminaire made of massive aluminium.
- Length x width 187 x 94 mm, installation height 115 mm.
- Luminous flux 2 x 730 lm, IP20.
- Continuously dimmable.
- 5 different products are available in optically the same interior look.
- This allows the realization of the projects with different mounting types recessed and surface mounting in different outer shells with similar internal insert.

**IMPLEMENT LED surface mounted downlight, 2-x, trailing-edge phase dimmable**

Article no. 12393173

Light.  
For Generations.

Article data	
Article no.	12393173
GTIN	4251433925767
Series name	IMPLEMENT
Short description	LED surface mounted downlight, 2-x, trailing-edge phase dimmable
Material	Aluminium / Plastic
Colour	White
Type of surface	Structure
Shape	Rectangular
Length	187 mm
Width	94 mm
Hight	115 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, trailing-edge phase dimmer
Weight	0.837 kg

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	1,460 lm
System efficiency	164 lm/W
Colour rendering	CRI > 90
Reflector	High-gloss
Reflector colour	silver
Beam angle	37°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	17.8 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP20
Dimmable	Yes
Control	Trailing-edge phase
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
stamp	UKCA
Material cover	Plastic, transparent

**IMPLEMENT LED surface mounted downlight, 2-x, trailing-edge phase dimmable**

Article no. 12393173

Light.  
For Generations.

Packing data	
Gross weight	0.934 kg
Length of packaging	230 mm
Packaging width	135 mm
Packaging height	140 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>