

BRUMBERG

COATIS LED surface-mounted wall light, IP65, switchable

Article no. 10222103

Light. For Generations.

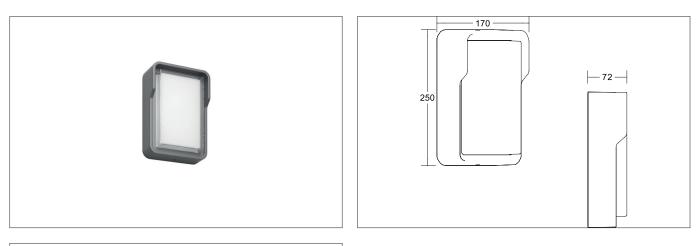





Tender

LED surface-mounted wall light, IP65, switchable, Rectangular., Hight 72.0 mm Weight 1.26 kg, with rotattionssymmetrical, deep, wide distributed light intensity.Luminous flux 825 lm, Power 1 x 12 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium, Colour: Graphite, Permissible ambient temperature (ta): -20 to +45°C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65, .With electronic driver, on/off switchable.

Article data	
Article no.	10222103
GTIN	4255752500292
Series name	COATIS
Short description	LED surface-mounted wall light, IP65, switchable
Material	Aluminium
Colour	Graphite
Type of surface	Structure
Shape	Rectangular
Hight	72 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, switchable
Weight	1.260 kg

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 25.02.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

BRUMBERG

COATIS LED surface-mounted wall light, IP65, switchable Article no. 10222103

Light. For Generations.

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	825 lm
System efficiency	69 lm/W
Colour rendering	CRI > 80
Luminaire optics	Cover satin
Beam angle	113°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	12 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	
Degree of protection	IP65
Ambient temperature	-20 bis +45°C
Dimmable	No
Control	on/off
Pulh change possible	The light source of this luminaire may only be replaced by the manufacturer or a service
Bulb change possible	technician commissioned by him or a similarly qualified person.

Mounting technology		
Mounting method	Surface mounting	
Place of installation	Wall-mounted	
Adjustability	Not adjustable	
stamp	UKCA	
Suitable for through-wiring	No	

Packing data	
Gross weight	1.46 kg
Length of packaging	175 mm
Packaging width	95 mm
Packaging hight	265 mm
	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you
	support recycling or other forms of re-use. In that way you help to take care and to avoid that
	harmful substances get into the environment.

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 25.02.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/