

## eHMA60

### MIXING AMPLIFIER

*Powered mixer*



### PRODUCT OVERVIEW

ECLER ESSENTIALS eHMA60 is a self-powered audio mixer including one MIC input and two MIC/LINE ST inputs. It features a 60W powered output that supports both low (4 Ω) and high impedance (70V, 100V) loudspeaker lines. It also includes an audio priority system (paging, emergencies, etc.), 2 band tone control, auto stand-by mode, MUTE port and universal power supply unit, being compatible with external 24 VDC IN supply systems. eHMA60 is the perfect integral solution for budget and user-friendly professional audio projects.

### KEY FEATURES

- 1x60W @ 4Ω / 70V / 100V
- 1 MIC input
- 2 MIC / LINE inputs (INPUT 1 - Talkover function)
- 2-band EQ (BASS/TREBLE) for Mix Output
- 24VDC power supply included
- 24VDC Phantom Power (external switch)
- MUTE port to remotely mute the unit from an external device, via dry contact closure
- Auto Stand-by function

### APPLICATIONS

- Retail stores, restaurants and bars
- BGM & Paging solutions, with message priorities and source/volume independent selection



### ACCESSORIES AND COMPATIBLE PRODUCTS

- 1UHRMKIT (1RU Rack mount kit)



1UHRMKIT

MECHANICAL DIAGRAMS

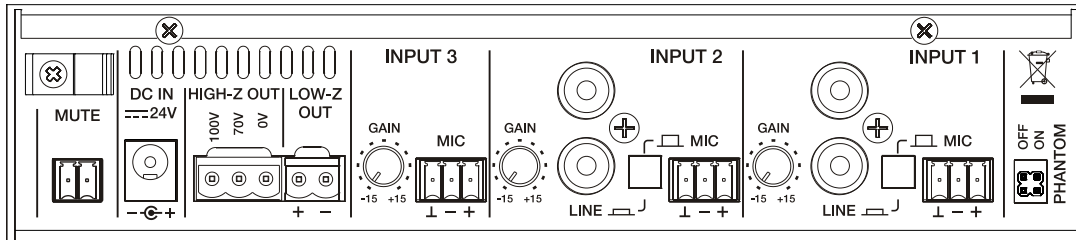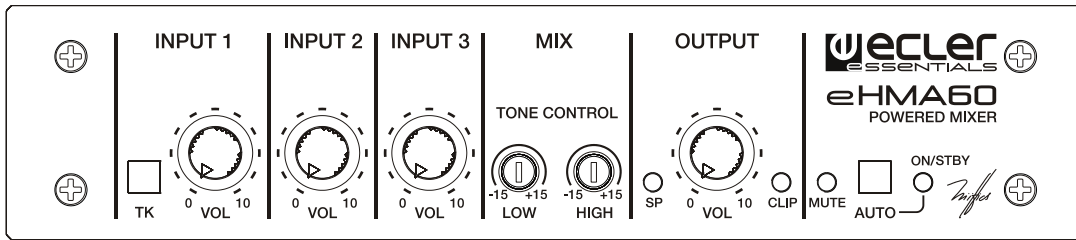

TECHNICAL DATA

<b>Power output</b>	
100V output	60W @ 166Ω 1% THD
Low Z output	66 W @ 4Ω 1% THD
Frequency response (HPF at 70Hz)	70Hz - 30kHz (-3dB)
THD+Noise @ 1kHz Full Power, Speaker Out, Line	<0.08%
Channel crosstalk @ 1 kHz	>65dB
<b>Sensitivity / Nominal impedance</b>	
INPUT 1 LINE	-15dBV to + 15dBV / >10 kΩ
INPUT 2 LINE	-15dBV to + 15dBV / >10 kΩ
INPUT 1 MIC	-20dBV to -50dBV / >1 kΩ
INPUT 2 MIC	-20dBV to -50dBV / >1 kΩ
INPUT 3 MIC	-20dBV to -50dBV / >1 kΩ
<b>CMRR</b>	
MIC (BAL)	>65dB @ 1kHz
<b>Tone control (LINE &amp; MIC)</b>	
BASS	100Hz ±15dB
TREBLE	10kHz ±15dB
<b>Signal Noise Ratio (Gain at center, low Z output)</b>	
LINE	>85dB
MIC (BAL)	>75dB
<b>Talkover (INPUT 1)</b>	
Time	2 sec.
Depth	-30dB
<b>Phantom voltage</b>	
	+24VDC / 10mA max.
<b>Mute</b>	
Configuration	Normally open (by dry contact)
<b>Supply</b>	
DC supply	24V
Mains (using supplied DC adapter)	90-264VAC 47-63Hz
<b>Power consumption</b>	
Pink noise, 1/8 power	33 VA / 17W
Pink noise, 1/3 power	62 VA / 36W
Standby mode (time 2 minutes)	<4W
<b>Dimensions</b>	
Panel WxDxH (knobs excluded)	200x150x44mm
Weight	1.9kg

All product characteristics are subject to variation due to production tolerances. NEEC AUDIO BARCELONA S.L. reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.  
 Motors, 166-168 08038 Barcelona - Spain - (+34) 932238403 information@ecler.es [www.ecler.com](http://www.ecler.com)