



**B.E.G. LUXOMAT® net**



**DALI LINK Einzelraumlösung / Single Room Solution / Solution pièce individuelle**  
**STARTERSET-DALI LINK SMALL-OFFICE\* - 93840**

\*Starterset und DALI-Geschäfte nicht enthalten. \*Starterset und DALI-Geschäfte nicht enthalten. \*Starterset et magasins DALI ne pas inclure



**DALI LINK STARTERSET**

# 1.1.

Bitte lesen!  
Please read!  
Merci de lire!




# 1.2.


Auf erlaubte Topologie achten!

Consider allowed topology!


Les types de câblages autorisés !




Bus




Ring




Star



Extended Star




Hierarchical



Mesh

# 1.3. Nur niederspannungsfestes Kabel nutzen! Use wires according to low voltage regulatories only! Câble à utiliser !



NYM-J (1,5mm<sup>2</sup> / 2,5mm<sup>2</sup>)



J-Y(ST)Y

# 2.1.

App installieren!




Install the app!

Installez L'application !






# 2.2.

Sprache wählen!  
Select language!  
Choisissez la langue !

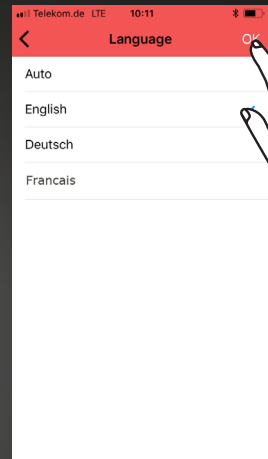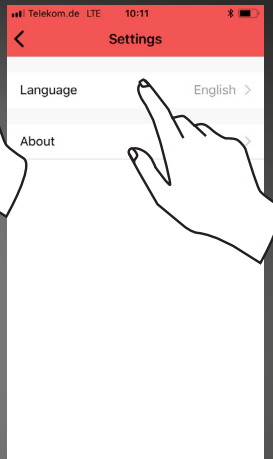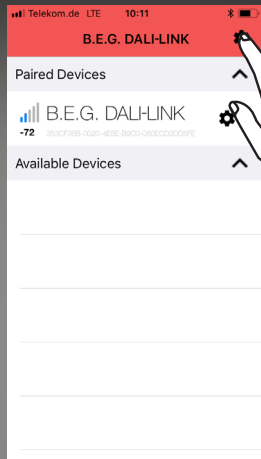

# 2.3.




Raum/Ort benennen!  
Name room/location!  
Nommez le lieu / pièce !

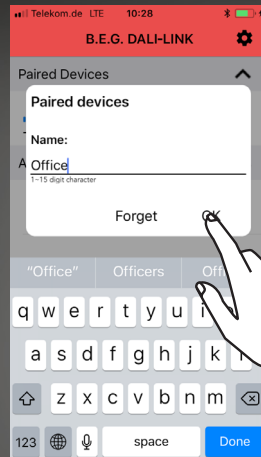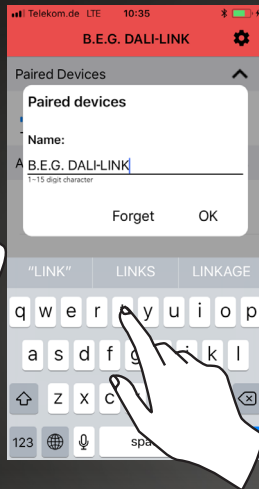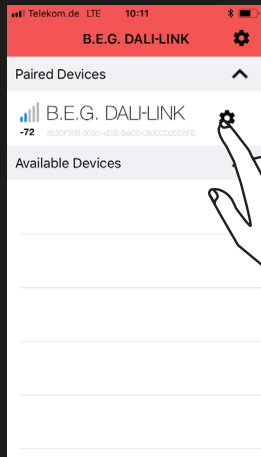






# 2.4.

Nutzen Sie „123456“ zum Koppeln!  
Use “123456” for pairing!  
Utilisez « 123456 » pour jumeler !

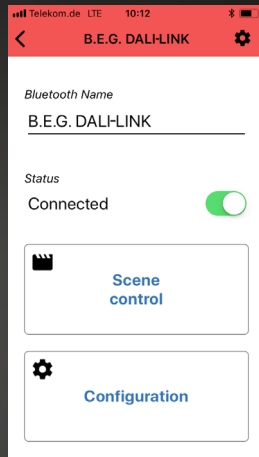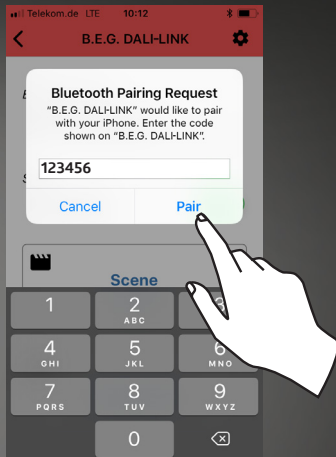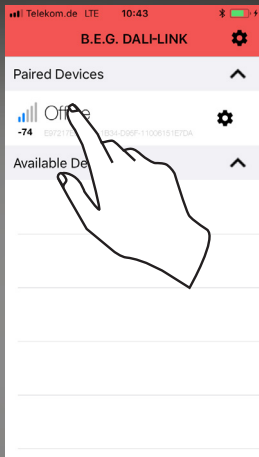



# 2.5.

Passwort ändern!  
Change password!  
Changez le mot de passe !

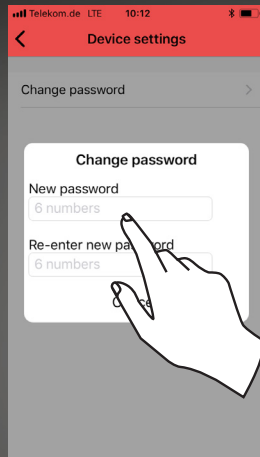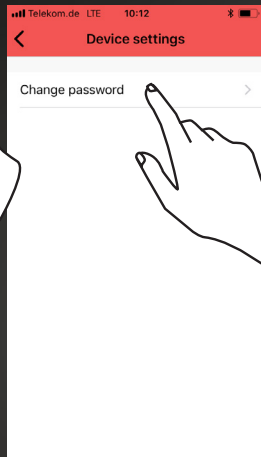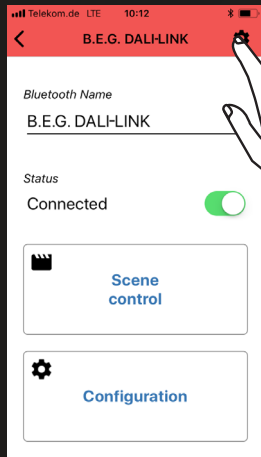



# 2.6.

Konfigurationsmodus mit QR-Code freischalten!  
Unlock configuration mode with QR code!  
Entrez dans le mode configuration avec le QR-Code !

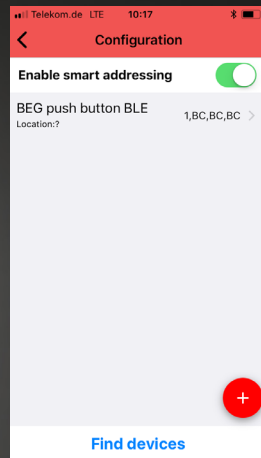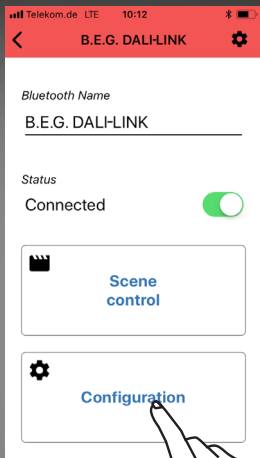



# 3.1.

Finden/adressieren Sie Geräte!  
Find/address devices!  
Trouvez/Adressez les participants !

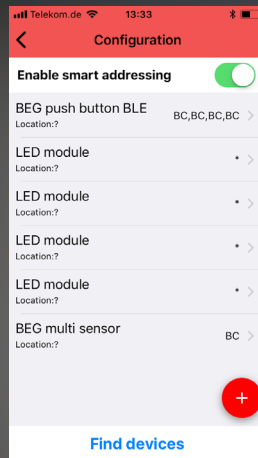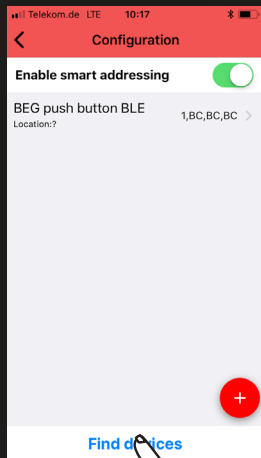

# 3.2.

Benennen und gruppieren Sie Geräte!  
Name and assign group id's to the devices!  
Nommez et Groupez les participants !


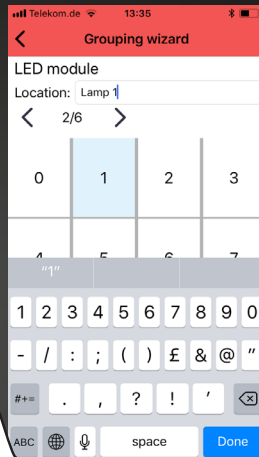
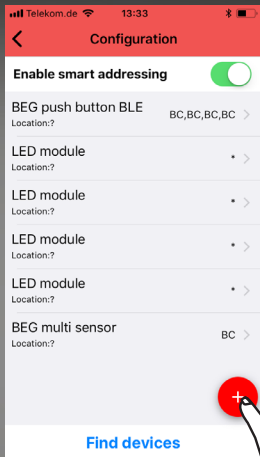


# 3.3.

Ändern Sie Geräteparameter wie gewünscht!




Change device parameters at will!

Changez les paramètres des participants comme vous le souhaitez !

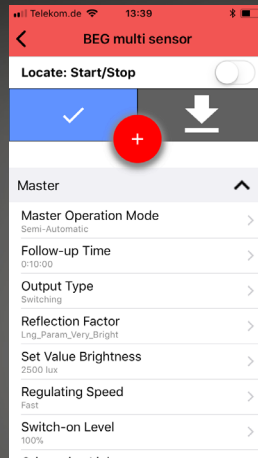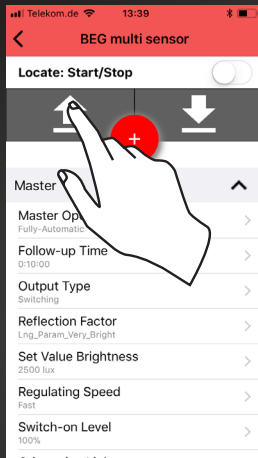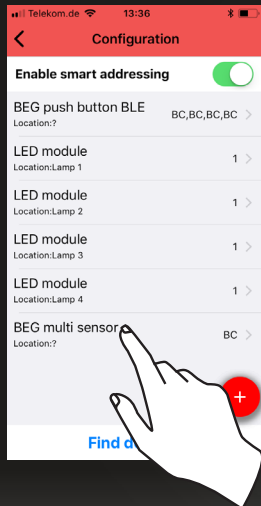

# 4.1.

Erstellen Sie Szenen!  
Create scenes!  
Configurez des scènes !

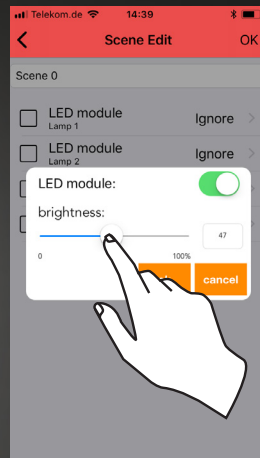
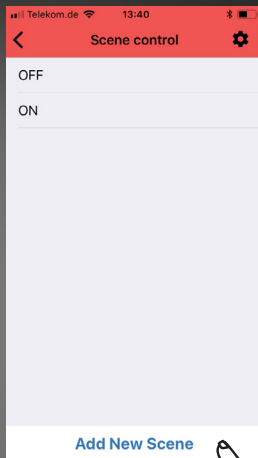
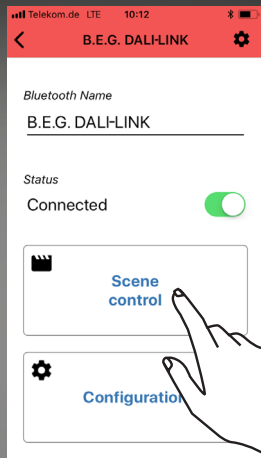


# 4.2.

Bearbeiten oder löschen Sie Szenen!

Edit or delete scenes!




Modifiez ou supprimez des scènes !

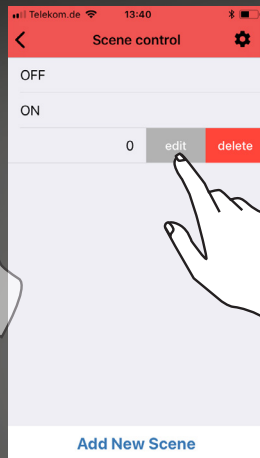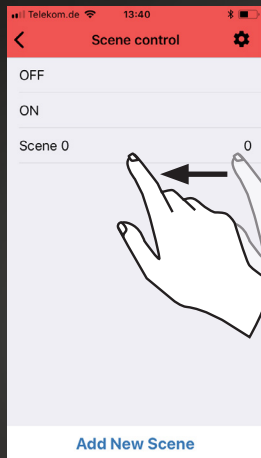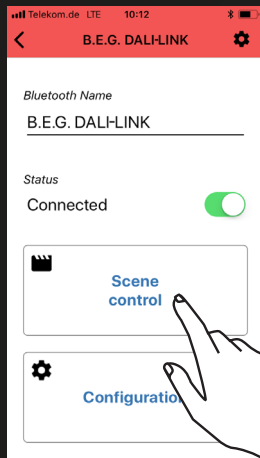




# 5.1.

Fehlermeldungen!  
Error messages!  
Messages d'erreurs !

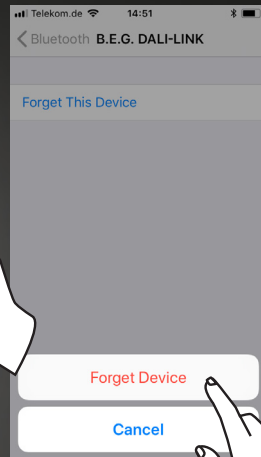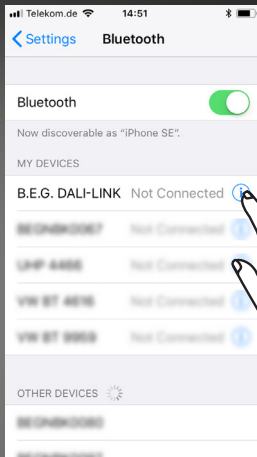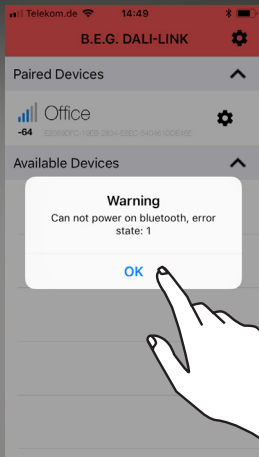

# 6.1.

Applikationsbeschreibung herunterladen ([beg-luxomat.com/loesungen/dali-link/](http://beg-luxomat.com/loesungen/dali-link/))!  
Download the application description ([beg-luxomat.com/en/solutions/dali-link/](http://beg-luxomat.com/en/solutions/dali-link/))!  
Obtenez plus d'informations ([beg-luxomat.com/fr/solutions/dali-link/](http://beg-luxomat.com/fr/solutions/dali-link/))!

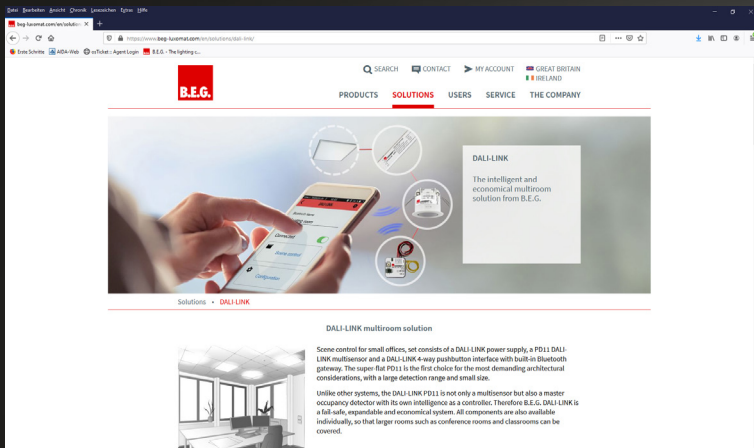

**B.E.G.** SEARCH CONTACT MY ACCOUNT GREAT BRITAIN IRELAND

PRODUCTS SOLUTIONS USERS SERVICE THE COMPANY

**DALI-LINK**


The intelligent and economical multiroom solution from B.E.G.

Solutions • DALI-LINK

**DALI-LINK multiroom solution**

Scene control for small offices, set consists of a DALI LINK power supply, a PD11 DALI-LINK multisensor and a DALI-LINK 4-way pushbutton interface with built-in Bluetooth gateway. The super flat PD11 is the first choice for the most demanding architectural considerations, with a large detection range and small size.

Unlike other systems, the DALI LINK PD11 is not only a multisensor but also a master occupancy detector with its own intelligence as a controller. Therefore B.E.G. DALI LINK is a fast, safe, expandable and economical system. All components are also available individually, so that larger rooms such as conference rooms and classrooms can be covered.

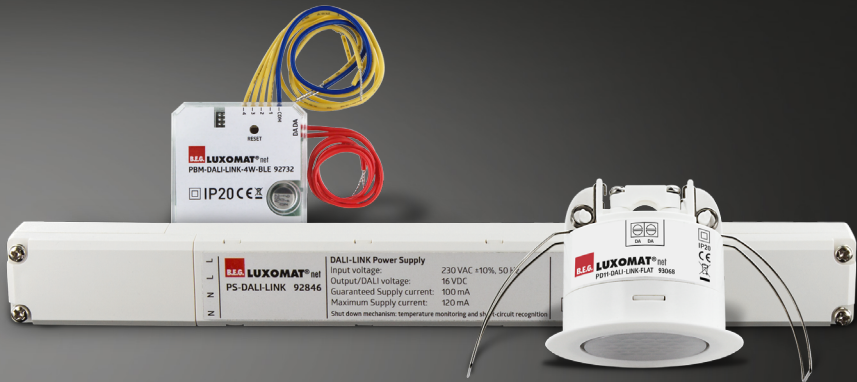

RESISTOR  
1 2 3 4 5 6 7 8 9 10  
DALI  
RESET  
**REG LUXOMAT® net**  
PBM-DALI-LINK-4W-BLE 92732  
IP20 CE

L  
N  
N  
N  
**REG LUXOMAT® net**  
PS-DALI-LINK 92846

DALI-LINK Power Supply  
Input voltage: 230 VAC ±10%, 50 Hz  
Output/DALI voltage: 16 VDC  
Guaranteed Supply current: 100 mA  
Maximum Supply current: 120 mA  
Shut down mechanism: temperature monitoring and short-circuit recognition

**REG LUXOMAT® net**  
PDM-DALI-LINK-FLAT 93046  
DALI  
CE



**B.E.G. Brück Electronic GmbH**

Gerberstraße 33  
51789 Lindlar

T +49 (0)2266-90121-0  
F +49 (0)2266-90121-50

info@beg.de  
beg-luxomat.com