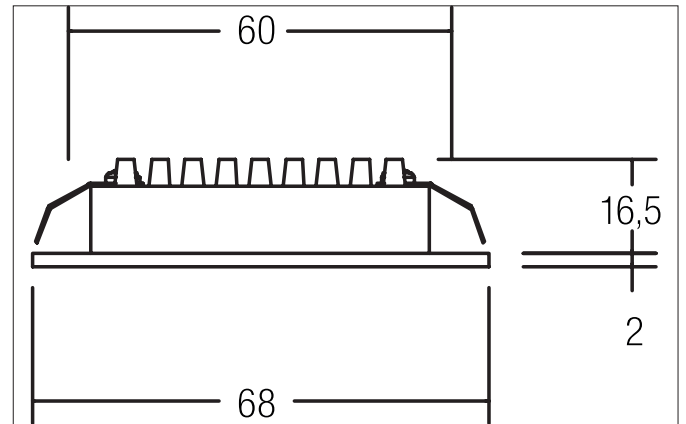


**PARENTA LED recessed downlight**

Article no. 12090073

Light.  
For Generations.**Tender**

LED recessed downlight, Round. Toolless ceiling installation by leaf spring. Ceiling cut-out Ø 60 mm, Installation depth 16,5 mm, Outer diameter 68 mm, Weight 0,064 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, transparent cover. Luminous flux 300 lm, Power 1 x 3 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Plastic, Colour: White, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP20, .For connection to an external driver, which is not included in the scope of delivery of the luminaire. Depending on driver dimmable.

| Article data          |                        |
|-----------------------|------------------------|
| Article no.           | 12090073               |
| GTIN                  | 4250047793878          |
| Series name           | PARENTA                |
| Short description     | LED recessed downlight |
| Material              | Aluminium / Plastic    |
| Colour                | White                  |
| Type of surface       | Matt                   |
| Shape                 | Round                  |
| Outer diameter        | 68 mm                  |
| Built-in diameter_min | 60 mm                  |
| Built-in diameter     | 60 mm                  |
| Installation depth    | 16.5 mm                |
| Hight                 | 2 mm                   |
| Weight                | 0.064 kg               |
| Conformance           | CE, UKCA               |

**PARENTA LED recessed downlight**

Article no. 12090073

Light.  
For Generations.

| Lighting technology          |            |
|------------------------------|------------|
| Colour temperature           | 3.000 K    |
| Light colour                 | White      |
| Light output                 | Direct     |
| Luminous flux                | 300 lm     |
| System efficiency            | 100 lm/W   |
| Colour rendering             | CRI > 80   |
| Reflector                    | High-gloss |
| Reflector colour             | silver     |
| Beam angle                   | 120°       |
| Light sharing                | Symmetric  |
| Adjustable color temperature | No         |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| System output                         | 3 W  |
| Voltage type                          | DC   |
| Current                               | 350 mA   |
| Lamp                                  | LED  |
| Lamp holder                           | Plug&Play  |
| Protection class                      | III  |
| Degree of protection                  | IP20   |
| Dimmable                              | Depending on type of control gear  |
| Control                               | Depending on driver  |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology   |   |
|-----------------------|---|
| Mounting method       | Recessed mounting                         |
| Place of installation | Ceiling-mounted                           |
| Adjustability         | Not adjustable                            |
| Further references    | No cover with thermal insulation material |
| Material cover        | Plastic, transparent                      |

| Packing data            |   |
|-------------------------|---|
| Gross weight            | 0.079 kg  |
| Length of packaging     | 70 mm   |
| Packaging width         | 47 mm   |
| Packaging height        | 81 mm   |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.<br>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |

**PARENTA LED recessed downlight**

Article no. 12090073

Light.  
For Generations.

| Accessories   |   |
|---|---|
|    | Article no.: 17666000<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 5 W<br>Dimensions: 52 mm x 30 mm x 23 mm   |
|    | Article no.: 17662000<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 7,2 W<br>Dimensions: 68 mm x 35 mm x 21 mm |
|    | Article no.: 17662010<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 7,2 W<br>Dimensions: 68 mm x 35 mm x 21 mm |
|    | Article no.: 17662020<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 7,2 W<br>Dimensions: 68 mm x 35 mm x 21 mm |
|   | Article no.: 17613000<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 15 W<br>Dimensions: 115 mm x 34 mm x 19 mm |
|  | Article no.: 17613010<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 15 W<br>Dimensions: 115 mm x 34 mm x 19 mm |
|  | Article no.: 17613020<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 15 W<br>Dimensions: 115 mm x 34 mm x 19 mm |
|  | Article no.: 17621000<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 21 W<br>Dimensions: 128 mm x 50 mm x 13 mm |
|  | Article no.: 17621010<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 21 W<br>Dimensions: 128 mm x 50 mm x 13 mm |
|  | Article no.: 17621020<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 21 W<br>Dimensions: 128 mm x 50 mm x 13 mm |

**PARENTA LED recessed downlight**

Article no. 12090073

Light.  
For Generations.

| Accessories   |  |
|---|--|
|    | Article no.: 17663000<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 2,8 - 7 W<br>Dimensions: 110 mm x 50 mm x 19 mm  |
|    | Article no.: 17663010<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 2,8 - 7 W<br>Dimensions: 110 mm x 50 mm x 19 mm  |
|    | Article no.: 17663020<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 2,8 - 7 W<br>Dimensions: 110 mm x 50 mm x 19 mm  |
|    | Article no.: 17648000<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 0,7 - 17 W<br>Dimensions: 166 mm x 46 mm x 34 mm |
|   | Article no.: 17648010<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 0,7 - 17 W<br>Dimensions: 166 mm x 46 mm x 34 mm |
|  | Article no.: 17648020<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 0,7 - 17 W<br>Dimensions: 166 mm x 46 mm x 34 mm |
|  | Article no.: 17684000<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 2,8 - 7 W<br>Dimensions: 130 mm x 42 mm x 22 mm       |
|  | Article no.: 17684010<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 2,8 - 7 W<br>Dimensions: 130 mm x 42 mm x 22 mm       |
|  | Article no.: 17684020<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 2,8 - 7 W<br>Dimensions: 130 mm x 42 mm x 22 mm       |
|  | Article no.: 17658000<br>LED round converter 350 mA, DALI dimmable (digital)<br>Power: 2,1 - 9 W<br>Dimensions: 56 mm x 25 mm          |
|  | Article no.: 17658010<br>LED round converter 350 mA, DALI dimmable (digital)<br>Power: 2,1 - 9 W<br>Dimensions: 56 mm x 25 mm          |

**PARENTA LED recessed downlight**

Article no. 12090073

Light.  
For Generations.

| Accessories |   |
|-------------|---|
|             | <p>Article no.: 17658020<br/>LED round converter 350 mA, DALI dimmable (digital)<br/>Power: 2,1 - 9 W<br/>Dimensions: 56 mm x 25 mm</p> |
|             | <p>Article no.: 3835<br/>Plug &amp; Play extension lead 350 mA<br/>Dimensions: 500 mm</p>   |
|             | <p>Article no.: 3836<br/>Plug &amp; Play extension lead 350 mA<br/>Dimensions: 1,000 mm</p>   |
|             | <p>Article no.: 3837<br/>Plug &amp; Play extension lead 350 mA<br/>Dimensions: 2,000 mm</p>   |