

Load Disconnect Switches and Motor Starters

Safety switch



8146/5-V37-302-50-1050 Art. No. 201405



- Can be used with conventional drives and drives controlled by frequency converters
- Intelligent design: A single rotary actuator for actuating both main and auxiliary contacts, ≥ 20 ms leading auxiliary contact for safely disconnecting the frequency converter
- Version complies with IEC/EN 62626-1, Class 1
- The rotary actuator can be locked with 3 padlocks in the 0-position

WebCode 8146L



R. STAHL's 8146/5-V37 series safety switches safely disconnect the power supply to machinery and system components for cleaning and repair as prescribed. They can be used at frequencies from 5 to 400 Hz. All of the installed load disconnect switches have an AC-3 switching capacity. The switches can be locked in the 0-position using padlocks.

Technical Data

Explosion Protection

| | |
|---------------------------------|--------------------------------|
| Application range (zones) | 1 2 21 22 |
| IECEX gas certificate | IECEX PTB 06.0090 |
| IECEX gas explosion protection | Ex db eb IIC T6 Gb |
| IECEX dust certificate | IECEX PTB 06.0090 |
| IECEX dust explosion protection | Ex tb IIIC T80 °C Db |
| ATEX gas certificate | PTB 01 ATEX 1024 |
| ATEX gas explosion protection | Ex II 2 G Ex db eb IIC T6 Gb |
| ATEX dust certificate | PTB 01 ATEX 1024 |
| ATEX dust explosion protection | Ex II 2 D Ex tb IIIC T80 °C Db |
| Certificates | ATEX (PTB), IECEX (PTB) |

Electrical Data

| | |
|-------------------------------|----------------|
| Rated operational voltage AC | 690 V |
| Rated operational current | 16 A |
| Rated operational current | 16 A (T6) |
| Rated operational current | 0 A / 16 A |
| Switching capacity AC-3 230 V | 4 kW |
| Switching capacity AC-3 400 V | 7.5 kW |
| Switching capacity AC-3 440 V | 7.5 kW |
| Switching capacity AC-3 500 V | 7.5 kW |
| Switching capacity AC-3 690 V | 11 kW |
| Auxiliary contact NC | Without |
| Auxiliary contact NO | 1 NO / delayed |
| Frequency range | 50 – 60 Hz |

Load Disconnect Switches and Motor Starters

Safety switch



8146/5-V37-302-50-1050 Art. No. 201405

Ambient Conditions

| | |
|-----------------------------------|-------------------|
| Ambient temperature | -40 °C ... +51 °C |
| Extended ambient temperature min. | -40 °C |
| Extended ambient temperature max. | +69 °C |
| Extended ambient temperature | -40 ... +69 °C |


Mechanical Data

| | |
|--|--|
| Degree of protection (IP) | IP66 |
| Degree of protection note | acc. to EN/IEC 60529 |
| Enclosure material | Polyester resin, Glass fibre reinforced |
| Additional terminal | Standard (without) |
| Connection terminals of auxiliary contact solid max. | 6 mm ² |
| Connection terminals of auxiliary contact finely stranded max. | 4 mm ² |
| Connection terminals of auxiliary contact min. | 1.5 mm ² |
| Conductor cross-section min. | 2.5 mm ² |
| Conductor cross-section min. 2 | 0 mm ² |
| Conductor cross-section max. | 6 mm ² |
| Cable gland | 2 x M25 Ø 7 ... 17 mm 1 x M20 Ø 4 ... 13 mm |
| Type of connection cable | Solid Finely stranded |
| Construction type | Standard |
| Dimension A | 170 mm |
| Dimension B | 112.5 mm |
| Dimension C | 132 mm |
| Colour of handle | Yellow shroud, red handle |
| Seal | Silicone, foamed |
| Seal Notes | Seal optional: EPDM |
| Lockable in | 3x in 0 |
| Detailed number of poles | 3-pole |
| Weight | 1.59 kg |
| Weight | 3.51 lb |

Components

| | |
|------------|-----------------------|
| Entry type | Brass plate with 8161 |
|------------|-----------------------|

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

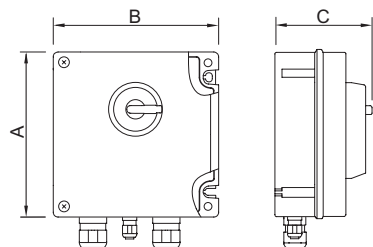



Load Disconnect Switches and Motor Starters

Safety switch



8146/5-V37-302-50-1050 Art. No. 201405

Accessories and Spare Parts

| Auxiliary contact key | | Art. No. |
|--|--|----------|
|  | for removing the mounted auxiliary contact | 201909 |
| Brass plate | | Art. No. |
|  | size 041 A 2 x M25, 1 x M20 | 202079 |

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.