


GGM INOX V4A (metr.)

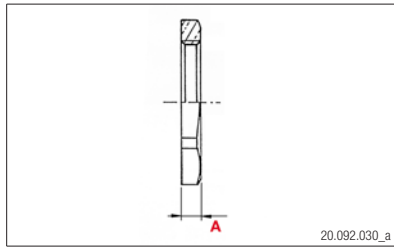

MAT

V4A / 1.4404 / AISI 316L
X2RCrNiMo17-12-2

TEMP

-50°C bis +250°C
-50°C à +250°C
-50°C to +250°C




NORM

EN 50262

Sechskantmutter GGM INOX V4A
Aus Edelstahl rostfrei.

Contre-écrou GGM INOX V4A
En acier inoxydable.

Locknut GGM INOX V4A
Stainless steel.

	A mm			Plica-Nr.	E-Nr.	VE
M12	3	15	V4A	92.6001.012	126 359 300	50
M16	3	20	V4A	92.6001.016	126 359 400	50
M20	3.5	24	V4A	92.6001.020	126 359 500	50
M25	3.5	30	V4A	92.6001.025	126 359 600	25
M32	4.5	35	V4A	92.6001.032	126 359 700	20
M40	4.5	45	V4A	92.6001.040	126 359 800	1
M50	5.5	55	V4A	92.6001.050	126 359 900	1
M63	6	70	V4A	92.6001.063	126 359 910	1
M75	8	80	V4A	92.6001.075	126 359 920	1