

SPECIFICATIONS OF NICKEL METAL HYDRIDE BATTERY

1.APPLICATION

The applicable range: This specification is available only for the testing within one month since receipt of batteries. It's not a standard for stored goods.

Model: X2700AAB4


2.RATINGS

Nominal Voltage	1.2 V
Typical Capacity	2700 mAh
Minimum Capacity	2500 mAh
Standard charge rate	250 mA x 16 h
Rapid charge rate	1250 mA x 140 min (stop when voltage reduce to 5 mV)
Value of dT/dt (for reference only)	1 to 2 °C/min
Operating temperature range	Humidity: +65 % ± 20 %
Standard charge	0 to +45 °C (32 to 113 °F)
Rapid charge	0 to +40 °C (32 to 104 °F)
Discharge	-10 to +55 °C (14 to 149 °F)
Storage temperature range	Humidity : +65 % ± 20 %
Within 1 year	-20 to +35 °C (-4 to 95 °F)
Within 6 months	-20 to +45 °C (-4 to 113 °F)
Within 1 month	-20 to +55 °C (-4 to 131 °F)
Within 1 week	-20 to +55 °C (-4 to 149 °F)

3. Measurement & Dimensions


... to see the drawing:

D	13.8 ~ 14.5 mm
H	49.5 ~ 50.5 mm



4. DISCHARGING AND CHARGING CURVES

4-1. Discharging Curves

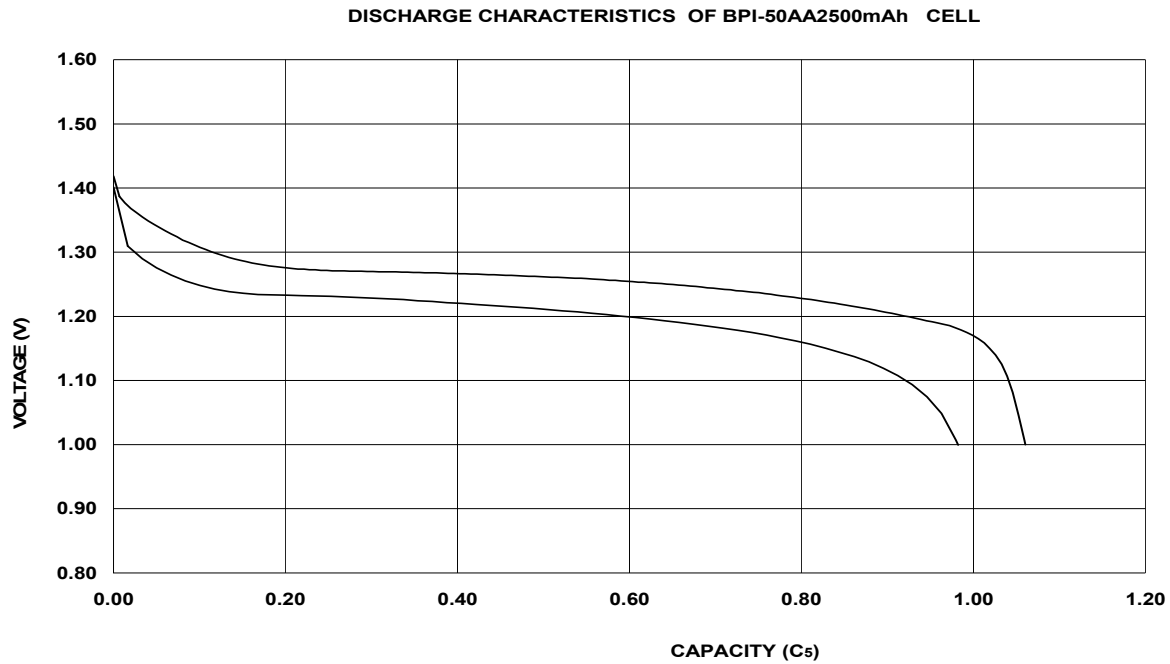

4-2. Charging Curves

