


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY.	MAX BUNDLE DIA	"LENGTH" ±.3 [7]
MLTFC2H-LP316	50	2" [51]	7.9"[201]
MLTFC2.7H-LP316	50	2.7" [69]	10.15"[258]
MLTFC4H-LP316	50	4" [102]	14.3"[362]
MLTFC6H-LP316	50	6" [152]	20.5"[521]
MLTFC8H-LP316	50	8" [203]	26.8"[679]

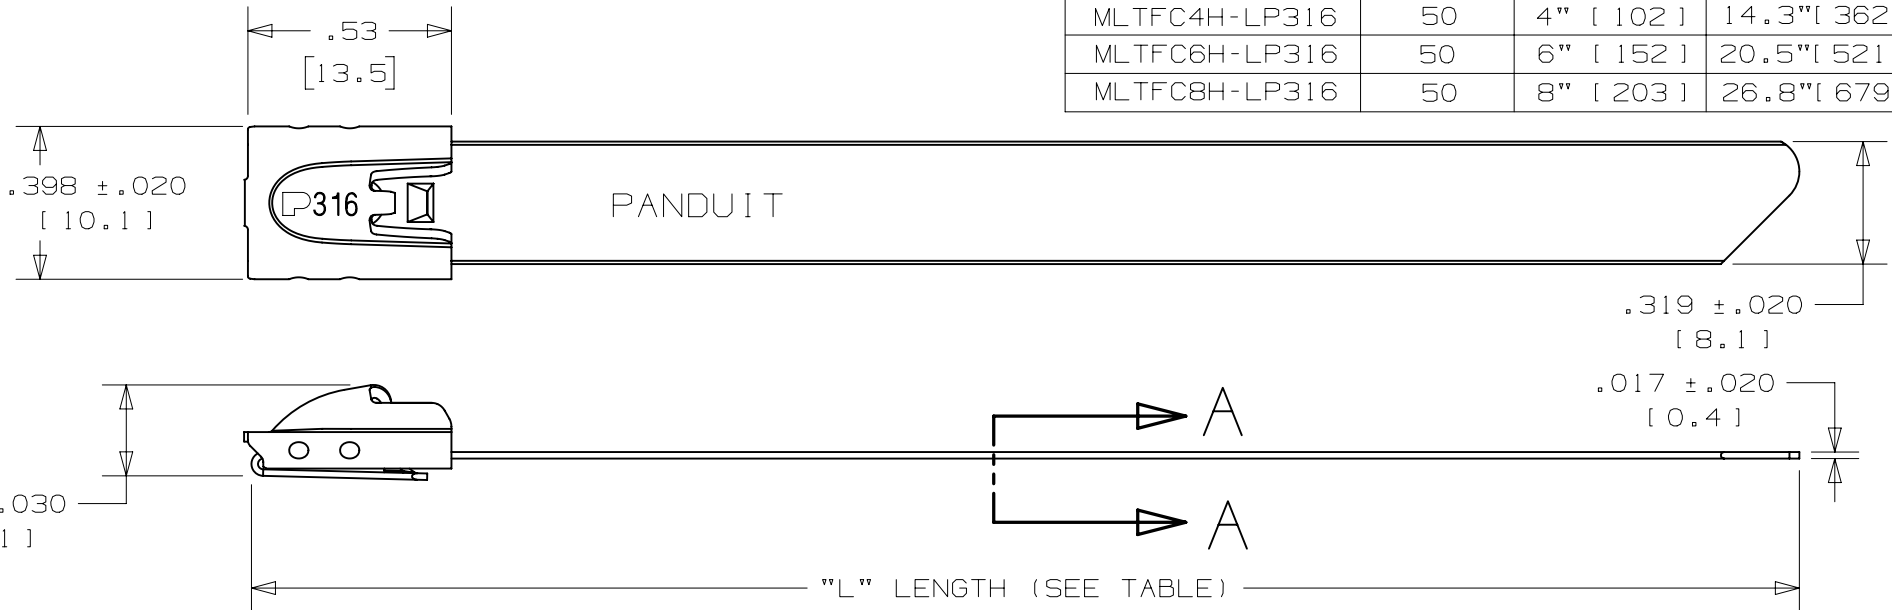

NOTES:

- APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, HTMT OR PBTMT
- MINIMUM LOOP TENSILE STRENGTH - 250 LBS. (1112 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
- BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
- TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°
- MATERIAL: 316 STAINLESS STEEL
- COATING - POLYESTER
 COATING THICKNESS: .002 MIN./ .005 MAX. PER SIDE

FULLY ROUNDED EDGES ALONG STRAP BODY

SECTION A-A
SCALE 4:1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
05A	10/14	JHNU	SKB	RGB	REMOVED ST3MT AND ADDED PBTMT TOOLS	SSECN01164
04A	4/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01047
03A	2/12	MIM	RGRO	---	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----
02	11/05	JMMR	EJD	---	ADDED MLTFC2.7H-LP316 TO TABLE	SS00112
01	3/05	JAMB	PAB	JJJ	DRAWING REVISED TO REFLECT CURRENT COATED HEAVY SERIES PRODUCT	12501
00	11/04	JAMB	PAB	JJJ	DRAWING RELEASED	12169

TITLE	
METAL LOCKING TIE - COATED HEAVY SERIES	
CUSTOMER DRAWING	
ITEM REVISION NAME	N41193BS/05
DATASET FILE NAME	N41193BS/05
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	PANDUIT MATERIAL: 316 STAINLESS STEEL
.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °	
THIRD ANGLE PROJECTION	DRAWING NUMBER: N41193BS_DC
DRAWN BY: JAMB	DATE: 11/04
CHK: PAB	SCALE: 2:1
SHT 1 OF 1	
SIZE: A	